

Installation and Operation Manual

SpliceDeck

for DaVinci Resolve Studio and Stream Deck

By Recourse Software Inc.

October 2026 · Plugin version 0.2

macOS · Windows · Linux (OpenDeck)

Plugin languages: English, Deutsch, Español, Français, 日本語



Welcome

Thank you for choosing SpliceDeck for your DaVinci Resolve editing suite.

If you edit, grade or deliver in Resolve every day, you already know the rhythm: find the moment, mark it, cut it, check it, render it. SpliceDeck puts that rhythm under your fingers. Every key and dial on your Stream Deck is connected to Resolve through its official scripting interface, so the deck always shows what is really happening in your project: the timecode under the playhead, the colour of the clip you are parked on, the markers ahead of you, the page you are working on and how far along your render is.

Because SpliceDeck talks to Resolve directly instead of pretending to be a keyboard, it works with any keyboard layout and any custom shortcut set, and it never presses the wrong key when Resolve is in a different window. When something stops it working, the keys tell you exactly what is wrong and how to fix it.

SpliceDeck runs on macOS and Windows in the Elgato Stream Deck app, and on Linux in OpenDeck. Every key works on every Stream Deck model, and the dials and touch strip of Stream Deck + turn into jog wheels, marker maps, colour pickers and render controls.

This manual contains everything you need to install SpliceDeck, connect it to Resolve and get the most out of all 53 actions. Start with **Getting Started** to be editing within a few minutes, then dip into the chapters for the parts of Resolve you use most.

We hope SpliceDeck becomes the part of your suite you stop noticing because it simply keeps up with you. Enjoy your edit!

The SpliceDeck team at Recourse Software Inc.

Contents

Getting Started 5
What You Need 5
Installing the Plugin 5
Turning On External Scripting in Resolve 6
Checking the Connection 7
Checking Python 7
The SpliceDeck Profile 8
Turning On Turbo Jog 9
Your First Edit 10

Understanding SpliceDeck 11
How SpliceDeck Works 11
Why Keys Are Not Keystroke Macros 13
Reading a Key 14
Resolve Pages and Where Actions Work 17
Using the SpliceDeck Profile 18
The Eight Action Groups 21

Navigating the Timeline 22
Playhead Jog 23
Step Playhead 29
Go To 29
Next/Prev Edit 30
Mark In and Mark Out 31
In/Out Dial 32
Live Timecode 33

Markers 35
How the Marker Keys Work 35
Add Marker 36
Holding Add Marker 37
Next Marker and Previous Marker 40
Delete Marker 40
Marker Color 41
Marker Dial 42
Markers at a Glance 43

Clips 44
The Clip Under the Playhead 44
Choosing What a Key Applies To 44
Split / Ripple Delete 45
Clip Color 46
Clip Flag 46
Clip Color Dial 47
Clip Enable 47
Apply LUT 48
LUT Browser 49
Grab Still 50
Color Version 51
Apply Grade (DRX) 51

Tracks and Timelines 52
How Track Keys Name Tracks 52
Track Actions 53
Timeline Actions 57

Rendering and Exporting 61
Following a Render 61
Where Your Files Go 62
Render Actions 63
Exporting Files 69
Export Actions 70

Project, Pages and Layout 75
Switching Pages 75
Saving Your Project 77
Project Information 79
Project Settings 80
Context Key 81
Layouts and Keyframes 82
Resolve Status Reference 83

Devices, Profiles and Settings 85
Stream Deck Models 85
The Bundled SpliceDeck Profile 86
Building Your Own Profiles and Pages 87
Using Multi-Actions 87
Platforms 88
Zooming the Timeline with Shift 90
SpliceDeck Settings 91
Languages 91
Performance 92

The SpliceDeck Harness 93
What You Need 93
Starting the Harness 93
Finding Your Way Around 94
Working with the Mock Resolve 95
Testing with Your Real Resolve 95

Help and Troubleshooting 96
What the Keys Are Telling You 96
Short Messages After a Press 97
Connection Problems 98
Turbo Jog, Zoom and Split 99
Markers and Ripple Delete 100
Finding the Log Files 101
Troubleshooting Checklist 102

Support and Legal 103
Getting Help 103
Your Data 103
Trademarks 104
Warranty and Disclaimer 104
Third-Party Software 105
About This Manual 105

Getting Started

At first glance a deck full of live keys can look like a lot to learn. In practice SpliceDeck is quick to set up: you install one plugin, switch on one setting in Resolve, and every key starts showing live information straight away.

This section shows you how to install SpliceDeck, connect it to DaVinci Resolve Studio, put your first keys on the deck and make your first edits with them.


What You Need

ITEM	REQUIREMENT
DaVinci Resolve	**Studio** edition, version 18.5 or later. Verified on Resolve Studio 20.2.3. The free edition of Resolve does not allow external scripting, so SpliceDeck cannot connect to it.
Stream Deck software	Elgato Stream Deck app 6.5 or later on macOS 12 or later, or Windows 10 or 11. On Linux, OpenDeck.
Stream Deck hardware	Any Stream Deck. Keys work on every model. Dial actions need a Stream Deck +.
Python	Python 3.8 or later, 64-bit. SpliceDeck finds it on its own: `python3` on macOS and Linux, and `py -3`, `python` or `python3` on Windows.


TIP To check which edition you have, open **DaVinci Resolve > About DaVinci Resolve**. The window says **DaVinci Resolve Studio** when you have the paid edition.

Installing the Plugin

1. Double-click the file `com.jauge.splicedeck.streamDeckPlugin`. The Stream Deck app opens and asks to install SpliceDeck. Click **Install**.
2. In the action list on the right of the Stream Deck app, a new category called **SpliceDeck for DaVinci Resolve** appears, marked with the SpliceDeck logo. It contains all 53 actions, sorted into eight groups.
3. On a Stream Deck +, the app also offers to install the **SpliceDeck** profile, a ready-made layout with a page for each Resolve page. Accept it to start with a finished deck.

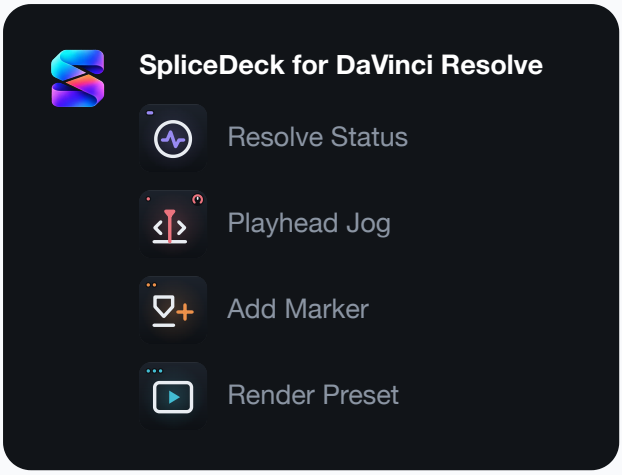

The SpliceDeck category in the Stream Deck app's action list. Each action shows its group colour.

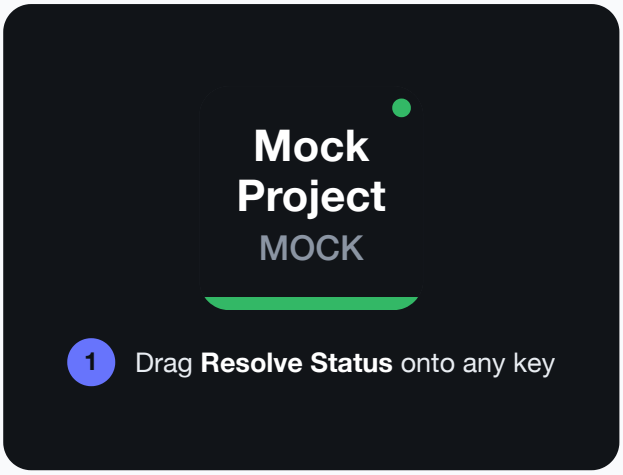


Resolve Status is the best first key: it shows the product, version and project as soon as SpliceDeck connects.

Turning On External Scripting in Resolve

SpliceDeck controls Resolve through the scripting interface that Blackmagic Design built into Resolve Studio. For safety it is switched off when Resolve is installed, so the first time you use SpliceDeck you need to allow local scripting.

1. In DaVinci Resolve Studio, open **DaVinci Resolve > Preferences** on macOS, or **File > Preferences** on Windows and Linux.
2. Select the **System** tab, then **General**.
3. Set **External scripting using** to **Local**, then click **Save**.
4. Quit and reopen Resolve so the change takes effect.

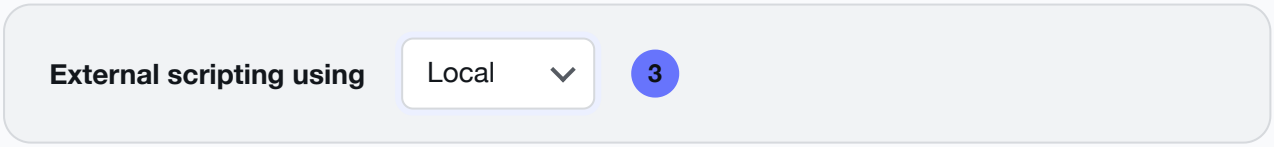


Choose **Local**. The **Network** option also works, but it lets other computers on your network script your Resolve, which SpliceDeck does not need.


NOTE If a Resolve dialog is open, for example Preferences, a save prompt or a render settings window, Resolve pauses all scripting until you close it. SpliceDeck's keys show **Offline** or stop updating while the dialog is open and recover by themselves as soon as you close it.

Checking the Connection


Put a **Resolve Status** key on your deck. It is the quickest way to see whether SpliceDeck can talk to Resolve, and it explains in plain words what to do when it can't.

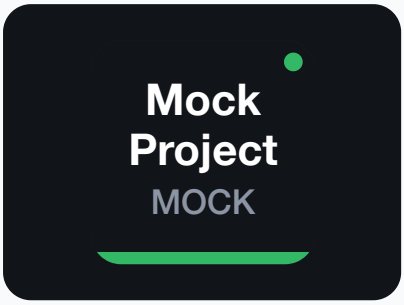

Connected. A green bar and dot. The key shows your project, timeline, page or Resolve version, whichever you choose in its settings.

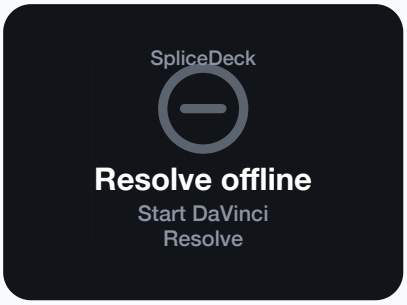

Offline. Resolve isn't running. SpliceDeck reconnects by itself when Resolve starts.

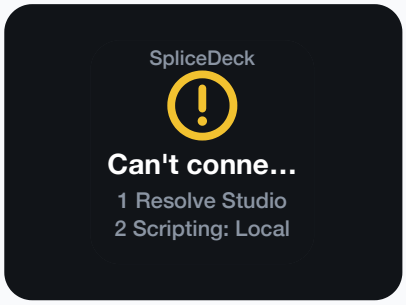

Script off. Resolve is running but refuses the connection. Switch on external scripting as described on the previous page.

Press the Resolve Status key to retry the connection straight away. Hold it for a moment to see diagnostics: how quickly Resolve is answering while connected, or the exact reason SpliceDeck can't connect while offline. **Help** at the end of this manual lists every state the keys can show.

Checking Python

SpliceDeck's connection to Resolve runs in a small Python program, because Resolve's scripting interface is built for Python. You don't need to know any Python, but it has to be installed.

- **macOS.** Install Python 3 from **python.org** or with Homebrew (`brew install python`).
- **Windows.** Install Python 3 from **python.org** and keep **py launcher** selected in the installer. SpliceDeck also looks in the usual install folders.
- **Linux.** Use your distribution's `python3` package.

> **TIP** If a key says **No Python**, open the settings of any SpliceDeck key, expand **SpliceDeck settings** at the bottom, and type the full path to your Python in **Python interpreter**. Leave it empty to go back to automatic detection.

The SpliceDeck Profile

On a Stream Deck +, the plugin installs a ready-made profile called **SpliceDeck**. It has eight Stream Deck pages, one for each of Resolve's pages, and the deck follows Resolve: when you change page in Resolve, the Stream Deck + jumps to the matching page. You can also drag actions from the SpliceDeck category onto any key or dial yourself, and change what each one does in its settings below the canvas in the Stream Deck app. Below is the Edit page of the profile.



The Edit page of the SpliceDeck profile. Every key and strip shows live state from Resolve; these images are drawn by SpliceDeck itself.

Top row	Split (hold: Ripple Delete), Live Timecode, Previous Marker, Next Marker
Bottom row	Mark In, Mark Out, Add Marker (hold: Markers panel), Save Project
Dials	Playhead Jog, Page Dial, Marker Dial, In/Out Dial

TIP If you build your own layout instead, make a separate Stream Deck **profile** or **page** for SpliceDeck rather than mixing it into your existing layouts. Your other profiles stay exactly as they are.

Turning On Turbo Jog

Resolve's scripting interface only lets other programs move the playhead about twice a second. To make jogging as smooth as a hardware editing panel, SpliceDeck can also use Resolve's own frame-step commands, which are not limited. This is called **Turbo Jog**, and it needs one permission on macOS.

1. On macOS, open **System Settings > Privacy & Security > Accessibility**.
2. Switch on **Elgato Stream Deck**. If it isn't listed, click **+** and add it from your Applications folder.
3. Quit and reopen the Stream Deck app.

Turbo Jog only sends frame steps while Resolve is the frontmost app, which is always the case while you work, because the Stream Deck never takes focus away from Resolve. The frame steps travel on their own stream, separate from everything else SpliceDeck does, so nothing waits on them. When you stop turning, SpliceDeck reads the playhead back once and, if anything doesn't line up, lands it on the exact frame through the scripting interface. On Windows no permission is needed. On Linux, Turbo Jog works in X11 sessions.

> **NOTE** Without the permission, jogging still works and always lands on the right frame. Resolve's viewer just updates about twice a second while you spin, instead of on every frame.

Your First Edit

With Resolve Studio open on the Edit page and a timeline loaded, try this. On a Stream Deck + with the SpliceDeck profile, the deck is already showing the Edit page:

1. **Turn the Playhead Jog dial.** The playhead moves one frame per click, faster the quicker you spin. The touch strip above shows the timecode and a small map of the timeline.
2. **Tap the jog's touch strip** to switch to **Scroll** mode, then turn the dial: each click now moves 1% of the timeline. Tap again to go back to Jog. Pressing the dial in also steps through the modes: Jog by frames, Jog by seconds, Scroll, and back to frames.
3. **Hold Shift on your keyboard and turn the jog dial.** The strip shows **ZOOM** and the dial zooms the timeline in and out. Press it to zoom to fit. Let go of Shift to jog again.
4. **Press Add Marker.** A blue marker appears at the playhead in Resolve, and the Marker Dial's map shows it immediately.
5. **Press Mark In,** jog forward, then **press Mark Out.** The In/Out Dial's strip shows the range and its duration.
6. **Press Previous Marker** to jump back to the marker you added, then **hold Add Marker**: Resolve opens its Markers panel so you can name the marker.
7. **Press Split** to cut the clip at the playhead. Hold it instead to ripple delete the clip under the playhead. Use **Edit > Undo** in Resolve to put it back.
8. **Press Save Project.** The key confirms the save and shows how long ago you last saved.

IMPORTANT SpliceDeck works on your real project. Keys like Save Project, Render Preset and Duplicate Timeline do exactly what they say. While you are learning, practise on a copy of your project or a spare timeline.

Understanding SpliceDeck

You can use SpliceDeck without knowing anything about how it works inside. A few minutes with this chapter will still pay off: once you know where the information on each key comes from, you can read the deck at a glance and you will always know why a key is behaving the way it is.

This chapter explains how SpliceDeck talks to DaVinci Resolve, how to read a key, which Resolve pages each action works on, and how the SpliceDeck profile used throughout this manual is laid out.

How SpliceDeck Works

SpliceDeck has three parts that work together. You install them all at once with the plugin, and they start and stop by themselves.

SpliceDeck plugin
Runs inside the Stream Deck app. It draws every key and touch strip and reacts to your presses, turns and touches.

SpliceDeck bridge
A small Python program that holds the connection to Resolve and does the work you ask for.

DaVinci Resolve Studio
Answers through its official scripting interface, the one Blackmagic Design documents for developers.

A key press travels from the plugin to the bridge, which asks Resolve to do it. Resolve's answer and every change in your project travel back the same way.

The bridge is the only part that talks to Resolve. It keeps one connection open for as long as Resolve is running, finds Resolve again by itself when you restart it, and tells the keys in plain words when something is in the way.

Live state

Between your presses, the bridge keeps asking Resolve what has changed: the playhead, the current page, the clip under the playhead, markers, In and Out points, tracks, timelines and render progress. Only the changes are sent to the plugin, and only the keys that show that information are redrawn.

The bridge asks more often while you are working and less often when nothing happens. Right after a change it checks again within 40 ms, when everything is quiet it slows down to a few times a second, and after a minute of no activity to once a second. The page and the playhead have their own fast lane, so a page you open with the mouse lights up on the deck almost instantly. When no SpliceDeck key is visible on your Stream Deck, the bridge checks only every two seconds.

> **TIP** On a laptop running on battery, open **SpliceDeck settings** at the bottom of any key's settings and set **Polling** to **Balanced** or **Battery saver**. The keys update a little less often and Resolve does less work. **Responsive** is the default.

Turbo Jog, a separate lane for the jog dial

Resolve's scripting interface accepts a new playhead position only about twice a second. That is fine for jumping to a marker, but far too slow for a jog wheel. So the Playhead Jog dial has a second, independent connection called **Turbo Jog**.

Turbo Jog is a separate small process. It does not use the scripting connection at all. Each click of the dial becomes one of Resolve's own Previous Frame and Next Frame commands, sent straight to Resolve, the same way a hardware editing panel does it. Nothing waits for the bridge, for polling or for an answer, so the viewer follows the dial frame by frame.

The touch strip shows where the playhead is going while you turn. About a fifth of a second after you stop, SpliceDeck checks the real position once through the scripting connection and lands the playhead on exactly the frame the strip showed. If Turbo Jog can't be used, for example because Resolve is not the frontmost app or macOS has not given the Stream Deck app Accessibility permission, the dial carries on through the scripting connection automatically. **Navigating the Timeline** explains Turbo Jog in more detail, and **Getting Started** shows how to give the permission.

Why Keys Are Not Keystroke Macros

Many Stream Deck plugins for video editing work by pretending to be a keyboard: a key press sends a shortcut and hopes that the right window is in front and that the shortcut has not been changed. SpliceDeck works differently. Almost every action asks Resolve directly, through the scripting interface, to do one exact thing, and reads the result back.

- **Any keyboard layout and shortcut set.** Your custom keyboard mapping in Resolve never changes what a SpliceDeck key does.
- **No wrong window.** A key never types into a browser or a mail window by mistake.
- **Keys show the truth.** Because SpliceDeck reads Resolve's state, a key can show the marker it will jump to, the colour of the clip you are parked on or how far a render has got.
- **Clear refusals.** When Resolve can't do something, the key says why, for example **No clip here** or **Wrong page**, instead of silently doing nothing.


A few things are not available in Resolve's scripting interface at all. For these, SpliceDeck uses Resolve's own commands, and only while Resolve is the frontmost app:

- **Turbo Jog** sends Resolve's Previous Frame and Next Frame commands (the Left and Right arrow keys).
- **Timeline zoom** on the jog dial, while you hold Shift, uses the **View > Zoom** menu on macOS and Resolve's default zoom shortcuts on Windows.
- **Split** on the Split / Ripple Delete key uses Resolve's **Timeline > Split Clips** menu item on macOS and its default shortcut on Windows.


NOTE Even these commands are checked. Turbo Jog confirms every spin by reading the playhead back, and if the frames don't line up, for example because you have remapped the arrow keys in Resolve, SpliceDeck switches Turbo Jog off for that dial and keeps working through the scripting connection.

Reading a Key

Every key and touch strip is drawn live from Resolve's current state. Most keys show what the key does, what it will act on, and whether that is possible right now.

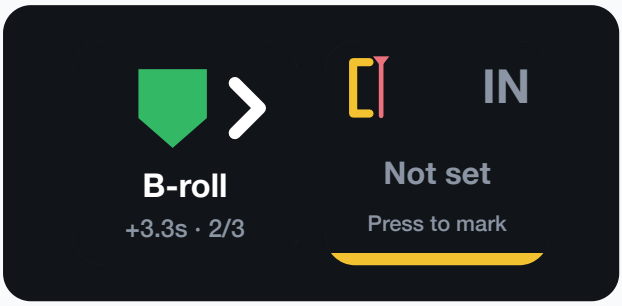

Live information. Next Marker previews the marker it will jump to and how far away it is. Mark In shows its timecode.

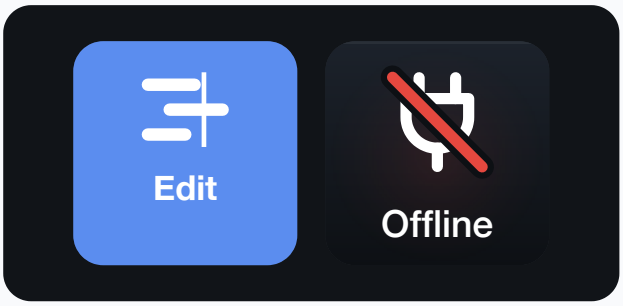

Lit and blocked. A Switch Page key for Edit lights up while Resolve shows the Edit page. A key that can't work right now is struck through and says why.

Group colours

Every action belongs to one of eight groups, and each group has its own colour. You will see it in the key's symbol, in the bar along the bottom of many keys and in the touch strip. It lets you spot, say, every marker key at a glance.

Group pips

So that you never have to rely on colour alone, most keys and every touch strip also carry a small group code in the top-left corner: a row of up to three dots and dashes. Each group has its own pattern. The same pattern appears in the footer of each chapter in this manual.

GROUP	PIPS	COLOUR
Core	–	Periwinkle
Playhead	·	Coral
Markers	· ·	Orange
Render	· · ·	Teal
Clips	– –	Chartreuse
Tracks	– ·	Azure
Timelines	– · ·	Orchid
Export	– – –	Mint

Status colours

Red, amber and green are never used as group colours. They are kept for status, so they always mean the same thing: green is connected or done, amber is a warning or something to check, and red is an error, a refusal or a render that is running and can be stopped.

Lit keys

Many keys light up when what they stand for is true right now: a Switch Page key while its page is open, a Clip Color key when the clip under the playhead already has that colour, a Mark In key when the playhead sits exactly on the In point. Lit keys follow Resolve, so they also change when you do the same thing with the mouse.


Confirmations and errors

When a key has done its job, it briefly shows a green confirmation, such as **Done**, **In/Out cleared** or the new mode of a dial. When Resolve refuses, the key shows a short red message for just over a second, for example **No clip here**, **Track locked** or **Resolve refused**, and the Stream Deck app adds its own alert triangle. Then the key returns to its normal face.


If Resolve is busy with something long, such as saving a large project or loading a page, keys that show live values add a small **Saving…** or **Loading page…** label instead of showing a frozen value as if it were current.

When a key can't work


A key that can't work right now draws its symbol struck through with a status-coloured line and one or two words that explain why. Presses are ignored, so nothing happens by accident, and the key goes back to normal by itself as soon as the problem is solved.

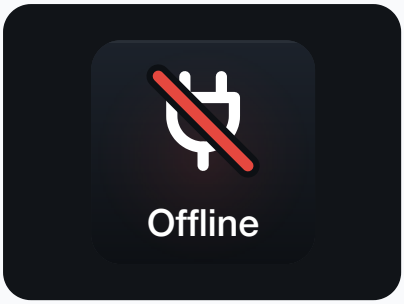

Offline. Resolve isn't running.

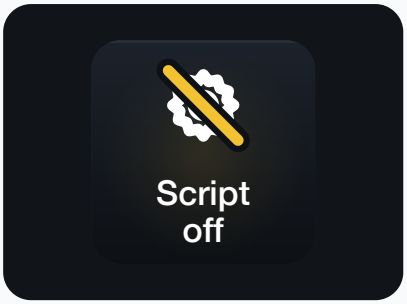

Script off. External scripting is switched off in Resolve's preferences.

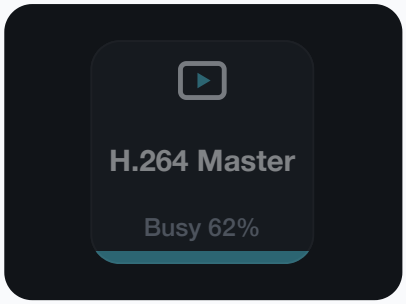

Busy. A Render Preset key while another render is running.

KEY SHOWS	WHAT TO DO
Connecting	SpliceDeck is starting. Wait a moment.
Offline	Start DaVinci Resolve Studio. SpliceDeck reconnects by itself.
Script off	Set **External scripting using** to **Local** in Resolve's preferences, then restart Resolve.
No API	Resolve's scripting files weren't found. Set the paths in **SpliceDeck settings**.
No Python	Install Python 3.8 or later, or set **Python interpreter** in **SpliceDeck settings**.
Reconnecting	The bridge is restarting by itself. Wait a moment.
No project	Open a project in Resolve.
No timeline	Open a timeline in the current project.

Resolve Pages and Where Actions Work

Resolve does not offer every scripting command on every page. The most important difference is the playhead: Resolve only reports and moves the playhead on the Cut, Edit, Color, Fairlight and Deliver pages. On the Media and Fusion pages there is no timeline playhead, so keys that need it tell you, for example Live Timecode shows **No playhead on Media**, until you switch back.

WORKS ON	ACTIONS
Every page	Resolve Status, Switch Page, Page Dial, Load Layout Preset, Keyframe Mode, Save Project, Auto-Save, Project Info, the render actions, the timeline actions, Export Project Backup and Export Stills.
Cut, Edit, Color, Fairlight and Deliver	Everything that uses the playhead: the playhead actions, Live Timecode, the marker actions, Export Frame, and the clip actions that work on the clip under the playhead.
Edit, Cut, Color and Fairlight	Turbo Jog on the Playhead Jog dial. On the Deliver page the dial still works, through the scripting connection.
Edit and Cut	Split on the Split / Ripple Delete key. On other pages the key is dimmed.
Color	Grab Still, because Resolve only grabs stills on the Color page. You can let the key hop to the Color page and back with its **Outside Color page** setting.

Actions that need a project, such as Save Project, show **No project** while the Project Manager is open without a project. Actions that work on a timeline show **No timeline** until you open one.

TIP Put a **Switch Page** key or a **Page Dial** on every Stream Deck page you use. When a key tells you it needs another page, you are one press away from it, and the lit page key always shows you where Resolve is.

NOTE A Resolve dialog, for example Preferences, Project Settings or a save prompt, pauses all scripting until you close it. Keys stop updating or show **Offline** while the dialog is open and recover by themselves afterwards.

Using the SpliceDeck Profile

The examples in this manual use the SpliceDeck profile, a ready-made Stream Deck + layout that comes with the plugin. The Stream Deck app offers to install it when you install SpliceDeck, and it appears in the profile list as **SpliceDeck**. It has eight Stream Deck pages, in the same order as Resolve's page tabs: Media, Cut, Edit, Fusion, Color, Fairlight, Deliver and Project. Dial 2 is the Page Dial on every page.

PAGE	KEYS, TOP ROW	KEYS, BOTTOM ROW	DIALS
Media	Project Info, Switch Timeline, Next/Prev Timeline, Auto-Save	Resolve Status, Load Layout Preset, Project Settings, Save Project	Timeline Browser, Page Dial, Live Timecode, Render Dial
Cut	Split / Ripple Delete, Live Timecode, Previous Marker, Next Marker	Mark In, Mark Out, Add Marker, Save Project	Playhead Jog, Page Dial, Marker Dial, In/Out Dial
Edit	Split / Ripple Delete, Live Timecode, Previous Marker, Next Marker	Mark In, Mark Out, Add Marker, Save Project	Playhead Jog, Page Dial, Marker Dial, In/Out Dial
Fusion	Live Timecode, Keyframe Mode, Step Playhead, Next/Prev Edit	Previous Marker, Next Marker, Add Marker, Save Project	Playhead Jog, Page Dial, Timeline Browser, Live Timecode
Color	Previous Clip, Next Clip, Grab Still, Color Version	Apply LUT, Apply Grade (DRX), Clip Color, Save Project	Playhead Jog (clip to clip), Page Dial, LUT Browser, Clip Color Dial
Fairlight	Track On/Off, Track Solo / Isolate, Track Lock, Previous Marker	Next Marker, Add Marker, Live Timecode, Save Project	Playhead Jog, Page Dial, Track Dial, Marker Dial
Deliver	Render Preset, Quick Export, Render Queue, Stop Render	Render Status, Export Timeline, Export Frame, Save Project	Render Dial, Page Dial, Export Timeline, Playhead Jog
Project	Project Settings, Project Info, Save Project, Auto-Save	Switch Timeline, Duplicate Timeline, Load Layout Preset, Export Project Backup	Timeline Browser, Page Dial, Render Dial, Live Timecode

The deck follows Resolve

Whenever Resolve changes page, whether you turn the Page Dial, click a page tab or press a keyboard shortcut, the Stream Deck + jumps to the matching page of the SpliceDeck profile. You never have to switch pages on the deck yourself.

- **Only confirmed changes.** The deck follows the page Resolve has actually opened. While you are still turning the Page Dial it stays where it is, so the dial under your finger is never replaced mid-spin.
- **Only the SpliceDeck profile.** SpliceDeck switches only to its own profile and never to one of yours.
- **Stream Deck + only.** Other models have no dials and do not get the bundled profile. Build your own pages for them, as described in **Devices, Profiles and Settings**.

Edit page



The Edit page is built around the jog dial on the left. Turn it to find a frame, press Split to cut there, mark a range with Mark In and Mark Out, and drop markers as you go. The Marker Dial and In/Out Dial let you jump between markers and trim the In and Out points without touching the mouse. The Cut page has the same layout.

Color page



On the Color page the jog dial walks from clip to clip, and every jump selects that clip for grading. Previous Clip and Next Clip on the first two keys do the same. Grab a still, apply a LUT or a saved grade, and step through colour versions to compare looks. **Grading Clip by Clip** in **Navigating the Timeline** explains the jog setting.

> **TIP** Prefer one page of keys that changes with Resolve? A **Context Key** becomes the right action for whichever page Resolve is on. **Project, Pages and Layout** describes it.

The Eight Action Groups

SpliceDeck has 53 actions, sorted into eight groups. In the Stream Deck app they appear in the **SpliceDeck for DaVinci Resolve** category, each with its group colour. Each group has its own chapter in this manual.

	GROUP	ACTIONS	WHAT IT COVERS
	Core	11	Connection status, pages and layouts, saving and auto-save, live timecode, project information and settings, keyframe mode and the Context Key.
	Playhead	7	Jogging and stepping the playhead, jumping to points and edits, and setting and trimming In and Out.
	Markers	6	Adding, finding, recolouring and deleting markers, and a marker map on the touch strip.
	Render	6	One-press renders with presets and Quick Export, the render queue, live progress and stopping a render.
	Clips	10	The clip under the playhead: colours, flags, enable, LUTs, grades, colour versions, stills, Split and Ripple Delete.
	Tracks	4	Switching tracks on and off, locking them and isolating one track, plus a whole track bank on a dial.
	Timelines	4	Opening timelines by name or in order, browsing them on a dial, and duplicating the current one as a new version.
	Export	5	Timeline exports such as XML, EDL and AAF, frames, stills, YouTube chapters and project backups.

Keys and dials

Most actions are keys and work on every Stream Deck model. Actions whose name ends in **Dial** or **Browser**, and Playhead Jog, are made for the dials and touch strip of Stream Deck +. A few actions work as either: Live Timecode, Color Version and Export Timeline can go on a key or on a dial, and Page Dial can also go on a key.

TIP Hover over an action in the Stream Deck app's action list to see a one-line summary of what it does. For dials, the Stream Deck app also shows what turning, pushing and touching do.

Navigating the Timeline

Finding the right frame is most of editing. The playhead actions give you a jog wheel, frame and second steps, jumps to the start, the end, edit points and any timecode you type, and keys and a dial for In and Out points. Every one of them shows on its face where the playhead is or where it is about to go.

All playhead actions need a timeline and a page with a playhead: Cut, Edit, Color, Fairlight or Deliver. On the Media and Fusion pages they show that the playhead isn't available and start working again as soon as you switch back.

	ACTION	TYPE	USE IT TO
	Playhead Jog	Dial	Jog by frames or seconds, scroll through the timeline, jump by edits or markers, and zoom the timeline.
	Step Playhead	Key	Move a fixed number of frames or seconds, once or repeatedly.
	Go To	Key	Jump to the timeline start or end, In or Out, the start or end of a clip, or a timecode.
	Next/Prev Edit	Key	Jump to the next or previous cut on the tracks you choose.
	Mark In	Key	Set the In point at the playhead, mark a whole clip, or clear In and Out.
	Mark Out	Key	Set the Out point at the playhead, mark a whole clip, or clear In and Out.
	In/Out Dial	Dial	Trim the In and Out points frame by frame, or slide the whole range.
	Live Timecode	Key or dial	Show the playhead as timecode, frames, seconds or time remaining, and jog on a dial.

Live Timecode belongs to the Core group, but because it is the readout you will look at most while navigating, it is described in this chapter too.


NOTE The playhead keys never move further than the timeline. A step or a jog that would go past the first or last frame stops there.

Playhead Jog

Playhead Jog STREAM DECK + DIAL

The jog wheel for your timeline. The touch strip shows the mode, the step per click, the playhead timecode and a small map of the timeline with your In and Out points and markers.

Turn	Move the playhead. Spin faster to move further.
Turn while pressed	Jump by edit points, markers or ten times the step. In clip mode the two swap.
Push	Switch mode: JOG · frames, JOG · seconds, SCROLL, and back.
Hold, then release	Switch acceleration on or off.
Tap the strip	Switch between JOG and SCROLL.
Hold the strip	Jump to that point of the timeline.
Shift + turn	Zoom the timeline in or out.
Shift + push	Zoom the timeline to fit.

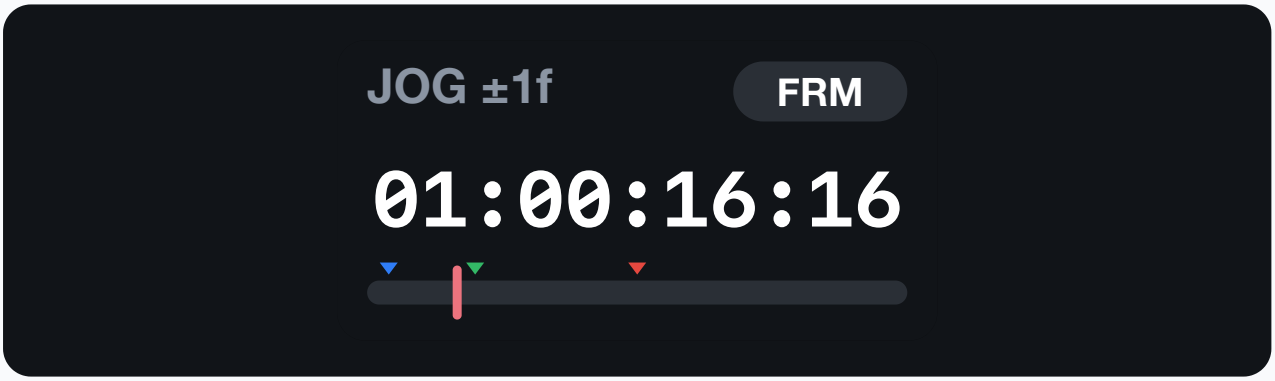

The jog strip in JOG mode. Top left: the mode and the step per click (**JOG ±1f**). Top right: the unit, **FRM** for frames, or the speed while you spin fast, such as **×3**. Centre: the playhead timecode. Bottom: the whole timeline, with the playhead, markers and In and Out points.

Turning the dial

Each click of the dial moves the playhead by the step shown on the strip, one frame by default. The strip shows the new timecode on the same click, before Resolve has even redrawn its viewer, so the dial always feels immediate. If Resolve is slow to confirm a move, the timecode is shown dimmed until it catches up, so the strip never shows a position as certain before it is.

Turbo Jog

Resolve's scripting interface only accepts a new playhead position about twice a second. To jog as smoothly as a hardware editing panel, Playhead Jog uses **Turbo Jog** whenever it can. Turbo Jog is a separate process from SpliceDeck's connection to Resolve: each click becomes one of Resolve's own Previous Frame and Next Frame commands, sent straight to Resolve. Nothing waits for an answer or for the next update, so Resolve's viewer follows the dial frame by frame.

While you spin, SpliceDeck also pauses its background checks of Resolve, so Resolve can spend all its time drawing frames. About a fifth of a second after you stop turning, SpliceDeck reads the real playhead position once and, if needed, lands the playhead on exactly the frame the strip shows.

Turbo Jog works when all of these are true:

- Resolve is the frontmost app. This is normally the case while you work, because the Stream Deck never takes the focus away from Resolve.
- On macOS, the Stream Deck app has Accessibility permission. **Getting Started** shows how to switch it on. Windows needs no permission. On Linux, Turbo Jog works in X11 sessions.
- Resolve is on the Edit, Cut, Color or Fairlight page.
- The dial is in JOG mode. SCROLL mode, very large steps and jumps to edits and markers always use the scripting connection.

When any of these is not true, the dial simply carries on through the scripting connection. It still lands on the right frame every time, but Resolve's viewer updates only about twice a second while you spin.

> **NOTE** Turbo Jog uses Resolve's default Previous Frame and Next Frame keys, the Left and Right arrows. If you have mapped those commands to other keys, SpliceDeck notices that the playhead does not end up where it should, and after a few spins it switches Turbo Jog off for that dial and uses the scripting connection instead.

Acceleration


With acceleration on, the faster you spin, the further each click moves: up to eight times the step. While acceleration is in use, the chip at the top right of the strip shows the current speed, for example **×3**. Turn slowly and every click is exactly one step again.

To switch acceleration off or on, push the dial, keep it pressed for about half a second, then release it without turning. The strip confirms **Acceleration off** or **Acceleration on**. You can also set it with the **Acceleration** checkbox in the settings.


Changing mode

A short push on the dial, released without turning, moves on to the next mode. The strip briefly confirms the new mode.


1. **JOG · frames.** Each click moves the step in frames. This is where the dial starts.
2. **JOG · seconds.** Each click moves the step in seconds. The chip shows **SEC**.
3. **SCROLL.** Each click moves a share of the whole timeline. The title turns to **SCROLL** and the chip shows **SCRL**. Push again to go back to JOG · frames.

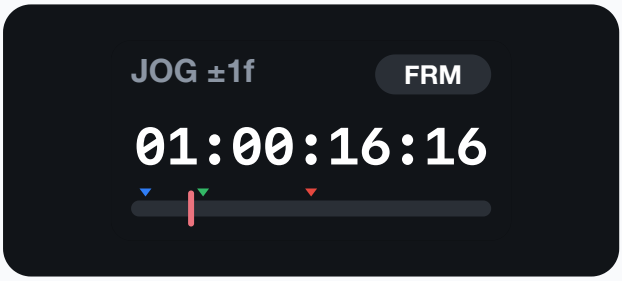


JOG · frames. One frame per click.

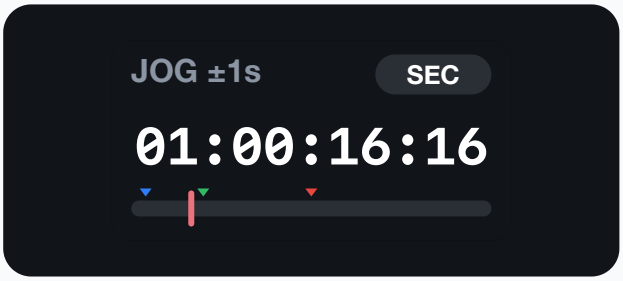

JOG · seconds. One second per click.

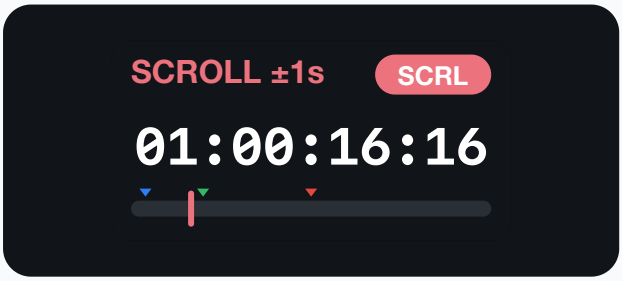

SCROLL. The title shows how far one click moves on this timeline.

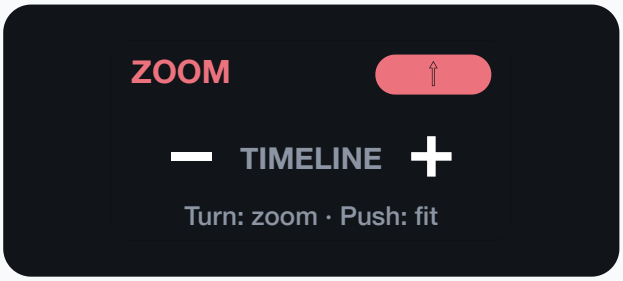

ZOOM ⇧. Shown while you hold Shift on the computer keyboard.

Scroll mode

Scroll mode is for getting around a long timeline quickly. Each click moves the playhead by a percentage of the timeline's length, 1% by default, and never less than one second. The strip title shows what that is in seconds on the current timeline, for example **SCROLL ±12s**. Set the percentage with **Scroll per tick (%)**, from 0.1% up to 25%.

Tapping the touch strip is the quickest way in and out of Scroll mode: one tap switches between JOG and SCROLL, and a second tap brings you back to the unit you were using.

Turning while pressed

Push the dial in and turn it while you keep it pressed to make bigger jumps. What a pressed turn does is set with **Turn while pressed**, and the chip on the strip shows it while you turn.

SETTING	CHIP	EACH CLICK WHILE PRESSED
Jump by edit points	`EDIT`	Jumps to the next or previous cut on the tracks set in **Tracks**. This is the default.
Jump by markers	`MRK`	Jumps to the next or previous timeline marker.
10x steps	`×10`	Moves ten times the normal step.

When there is nothing further to jump to, the strip shows **No more edits** or **No marker**. A push that ends with a turn never changes the mode or the acceleration, so you can press, pause and then turn without worrying.

Using the touch strip

The timeline map at the bottom of the strip stands for the whole timeline, from its first frame on the left to its last frame on the right. Touch and hold anywhere on the strip and the playhead jumps to that point of the timeline.

A short tap switches between JOG and SCROLL. If you would rather jump with a short tap too, set **Tap the strip** to **Jump to tapped point**. Then both a tap and a hold jump to the point you touched.

Zooming the timeline with Shift

Hold **Shift** on your computer keyboard and the jog dial becomes a timeline zoom. The strip changes to **ZOOM** ⇧ for as long as you hold Shift.

- **Turn clockwise** to zoom in one step per click, and **anticlockwise** to zoom out.
- **Push** to zoom the timeline to fit.


Release Shift and the dial is a jog wheel again, in the mode you left it in. Zooming works on macOS, where SpliceDeck uses Resolve's **View > Zoom** menu commands through Accessibility, and on Windows, where it sends Resolve's default zoom shortcuts. Resolve needs to be the frontmost app. If it isn't, the strip shows **Zoom: bring Resolve to the front**. Timeline zoom is not available on Linux.

> **TIP** If you often hold Shift while you jog, or use Linux, clear the **Shift + turn: zoom the timeline** checkbox. The dial then ignores the Shift key.

> **NOTE** If Resolve isn't showing a playhead, for example on the Media page, the strip shows **Edit, Cut or Color page** instead of the timeline map. Switch to one of those pages and the dial starts working.

Grading Clip by Clip

Switch on **Turn: clip to clip** in the dial's settings and the dial swaps its roles. A plain turn jumps to the next or previous clip, using the edit points on the tracks you chose, and **pushing and turning** moves by frames. The strip title changes to **CLIPS** so you can see which way the dial is set.

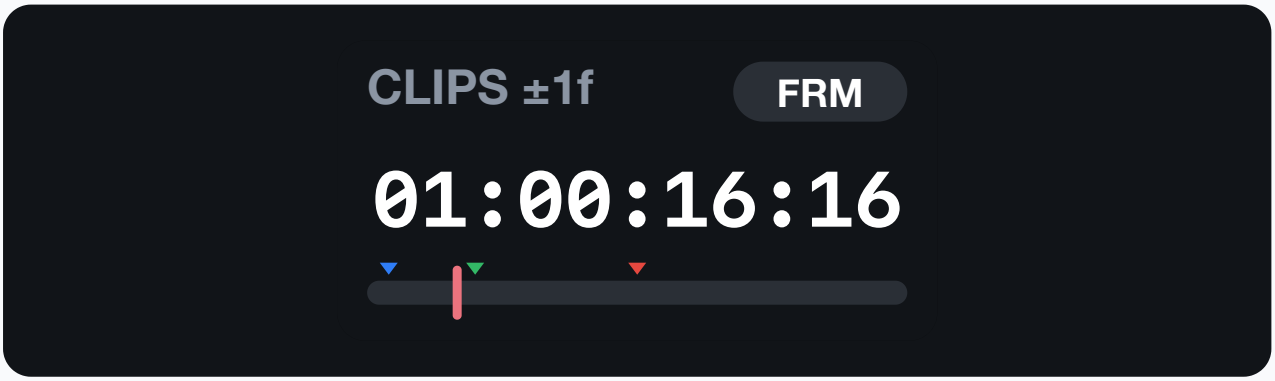

On the Color page every jump also selects the clip it lands on, so the grade you apply next goes to that clip. This is how the Color page of the SpliceDeck profile is set up.

Playhead Jog settings

SETTING	WHAT IT DOES
Mode	**Jog (frames / seconds)** or **Scroll (% of timeline)**. The mode the dial is in now. Pushing the dial or tapping the strip changes it too.
Scroll per tick (%)	How much of the timeline one click moves in Scroll mode, from 0.1 to 25. Default 1. One click is never less than one second.
Tap the strip	**Switch Jog / Scroll (hold: jump)**, the default, or **Jump to tapped point**.
Shift + turn: zoom the timeline	On by default. Holding Shift turns the dial into a timeline zoom.
Unit	**Frames** or **Seconds** for Jog mode.
Per tick	How many frames or seconds one click moves, from 1 to 1000. Default 1.
Acceleration	On by default. Faster spins move further, up to eight times the step.
Turn: clip to clip	Off by default. When on, a plain turn jumps from clip to clip and a pressed turn moves by frames. See **Grading Clip by Clip**.
Turn while pressed	**Jump by edit points**, **Jump by markers** or **10x steps**.
Tracks	For edit point jumps: **All video tracks**, **All audio tracks** or **Video + audio**.
Skip disabled tracks	On by default. Cuts on tracks you have switched off are ignored, like Resolve's own edit navigation.

Tracks and **Skip disabled tracks** appear only when **Turn while pressed** is set to **Jump by edit points**.

TIP A good setup for long-form editing is **Unit** set to Frames, acceleration on, and **Scroll per tick (%)** set to 2. Spin slowly to find a frame, spin fast to cover a scene, and tap the strip to fly across the whole timeline in Scroll mode.

Step Playhead



Step Playhead KEY

Moves the playhead by a fixed amount, forwards or backwards. The key shows the step, for example **+1f** or **–2s**, and the playhead timecode below it, which updates as soon as you press.


Press	Move the playhead by the amount.
Hold	Keep moving. After about a second the steps get bigger, and after about three seconds bigger again.

SETTING	WHAT IT DOES
Amount	How far one press moves. Use a negative number, such as –1, to step backwards. Default 1.
Unit	**Frames** or **Seconds**.

When you let go of a held key, the playhead stops straight away, even if Resolve is slow to catch up. It never keeps moving after you release the key.

TIP Place two Step Playhead keys side by side, one set to –1 and one to +1, for precise frame-by-frame nudging. Add a pair set to –5 and +5 seconds for quick review.

Go To



Go To KEY

Jumps the playhead to one exact place. The key shows the destination and its timecode, and lights up while the playhead is already there. When the destination doesn't exist yet, for example an Out point you haven't set, the key is dimmed and shows **Not set**.

Press	Jump to the destination.

SETTING	WHAT IT DOES
Go to	**Timeline start**, **Timeline end**, **In point**, **Out point**, **Start of the clip under the playhead**, **End of the clip under the playhead** or **Timecode**.
Timecode	The timecode to jump to. Shown only when **Go to** is set to Timecode. Default `01:00:00:00`.
From timeline start	Counts the timecode from the start of the timeline, so `00:00:10:00` means 10 seconds in.
Use current playhead	Copies the playhead's current timecode into the **Timecode** field.


Typing a timecode

The **Timecode** field accepts more than a full timecode:

- **A full timecode**, such as `01:02:03:04`.
- **A shorter timecode**, such as `10:00`, which means 10 seconds into the timeline's hour.
- **Digits only**, such as `01001000`.
- **A jump from the playhead**, starting with + or –. For example, `+2:00` jumps 2 seconds forward. The key title then changes to **Jump** and shows the distance.

Below the field, the settings show the exact timecode your entry stands for. The field turns red when the entry is not a valid timecode for this timeline, and amber when it is valid but outside the timeline.

Next/Prev Edit



Next/Prev Edit KEY

Jumps to the next or previous edit point, the start or end of a clip, on the tracks you choose. Before you press, the key shows how far away the edit is and its timecode. At the end of the timeline it shows **Last edit**, and at the start **First edit**.

Press	Jump to the edit point.

SETTING	WHAT IT DOES
Direction	**Next edit** or **Previous edit**.
Tracks	**All video tracks**, **All audio tracks**, **Video + audio**, or one track. Each track of the current timeline is listed by number and name, for example **V2 - Titles**.
Skip disabled tracks	On by default. Cuts on tracks you have switched off are ignored, like Resolve's own edit navigation.

While the timeline is playing, the distance on the key is rounded to whole seconds, so the key stays readable. As soon as playback stops, it shows the exact distance again.

Mark In and Mark Out



Mark In KEY

Sets the timeline's In point at the playhead. The key shows the In timecode and the duration of the range, **Δ**, and it lights up with an amber frame while the playhead is on the In point. Mark Out works the same way for the Out point.

Press	Set the In (or Out) point at the playhead.
Hold 0.8 seconds	Clear both In and Out. A red bar fills up on the key as you hold.

Automatic marks

Resolve's scripting interface can only set In and Out together. So when you set an In point and there is no Out point yet, SpliceDeck fills in the missing Out with the end of the timeline, or of the clip under the playhead if you choose that with **Missing mark**. Mark In works the same way the other way round, using the start of the timeline or clip.

A filled-in mark is shown dimmed and labelled **auto**, for example **Out: auto (end)**, until you set it yourself. The key with the automatic mark says **auto (press to set)**.

IMPORTANT Check an automatic Out point before you render the In/Out range or use Quick Export. If you only set an In, the render runs to the end of the timeline.

Mark In and Mark Out settings

SETTING	WHAT IT DOES
Press	**Mark at playhead (hold: clear)**, the default. **Mark Clip (In/Out around the clip)** sets In and Out around the clip under the playhead and shows the clip's name and duration. **Clear In/Out** turns the key into a dedicated clear key.
Marks	**Video + audio**, **Video only** or **Audio only**. With video or audio only, the key shows **VIDEO** or **AUDIO**.
Missing mark	**Timeline start / end** or **Clip under the playhead**. Where an automatic mark is placed.
Hold to clear	On by default. Clear this checkbox if you don't want a long press to clear the marks.

When there is nothing to clear, the key briefly shows **No In/Out**. After a successful clear it confirms **In/Out cleared**.

In/Out Dial



In/Out Dial STREAM DECK + DIAL

Sets and trims the In and Out points. The strip shows both timecodes, highlights the one the dial is trimming, and shows the range duration and a small timeline map.

Turn	Trim the selected point, In or Out.
Push	Switch between In and Out, and Slide if it is switched on.
Tap the strip	Set the selected point at the playhead. In Slide, mark the clip under the playhead.
Hold the strip	Clear In and Out.



The In/Out Dial's strip with neither point set. The amber frame shows which point the dial trims.

The strip shows each trim on the same click, and Resolve follows. Each click moves the point by the step, or further when you spin quickly with acceleration on. A point can't be trimmed past the other one, so the In point always stays before the Out point. If you start trimming without any marks, the In point starts at the playhead and the Out point at the end of the timeline.

Slide

With **Slide mode** switched on, pushing the dial cycles In, Out and then Slide. In Slide, both points are highlighted and turning moves the whole range along the timeline while keeping its duration.

SETTING	WHAT IT DOES
Marks	**Video + audio**, **Video only** or **Audio only**.
Frames per tick	How far one click trims, from 1 to 600 frames. Default 1.
Acceleration	On by default. Faster spins trim further.
Slide mode	Off by default. Adds Slide to the push cycle.

Live Timecode



Live Timecode KEY OR DIAL

Shows the playhead as a large timecode, with hours, minutes and seconds on the first line and the frames below, and the timeline name underneath. Drop-frame timecode is shown with a semicolon.

Press	Show the next format.
Turn (dial)	Jog the playhead, or change the format.
Push or tap (dial)	Show the next format.



Live Timecode on a dial: the format, the timeline name, the readout and what turning does.

Each press shows the next format, and the key remembers it:

1. **Timecode.** The playhead timecode.
2. **Frames from start** and **Seconds from start** of the timeline.
3. **Remaining to Out point** and **Remaining to timeline end**. When the playhead has passed the Out point or the end, the readout turns red and says **PAST OUT** or **PAST END**.

Live Timecode on a dial

On a Stream Deck + dial, Live Timecode becomes a large readout on the touch strip. Turning the dial jogs the playhead one frame per click by default, and the strip shows the new timecode straight away. Push the dial or tap the strip for the next format.

If you would rather use the dial only as a readout, set **Dial rotation** to **Change format**, and turning moves through the formats instead.

> **NOTE** Live Timecode jogs through Resolve's scripting connection, not Turbo Jog. For smooth frame-by-frame jogging, use the Playhead Jog dial.


SETTING	WHAT IT DOES
Format	**Timecode**, **Frames from start**, **Seconds from start**, **Remaining to Out point** or **Remaining to timeline end**.
Timeline name	On by default. Shows the timeline's name under the readout.
Dial rotation	**Jog frames**, the default, **Jog seconds** or **Change format**.
Step per tick	How far one click jogs: 1 to 240 frames, or 0.1 to 60 seconds. Default 1.
Max updates/s	How many times a second the key is redrawn during playback, from 2 to 30. Default 30, or 15 on Linux.
Touch strip	**Automatic (text on Linux / OpenDeck)**, **Graphic** or **Text only**.

On the Media and Fusion pages, where Resolve has no playhead, the key explains this, for example **No playhead on Media**. While Resolve is busy saving or loading a page, the readout shows **Saving…** or **Loading page…** instead of a frozen timecode.

Markers

Markers are the notes you leave in a timeline: a shot to fix, a line to check, a beat to cut on. SpliceDeck lets you drop, find, recolour and remove them without reaching for the mouse.

The Markers group has six actions. Five are keys: **Add Marker**, **Next Marker**, **Previous Marker**, **Delete Marker** and **Marker Color**. The sixth, the **Marker Dial**, puts all of them on one dial of a Stream Deck +, with a map of every marker on the touch strip.

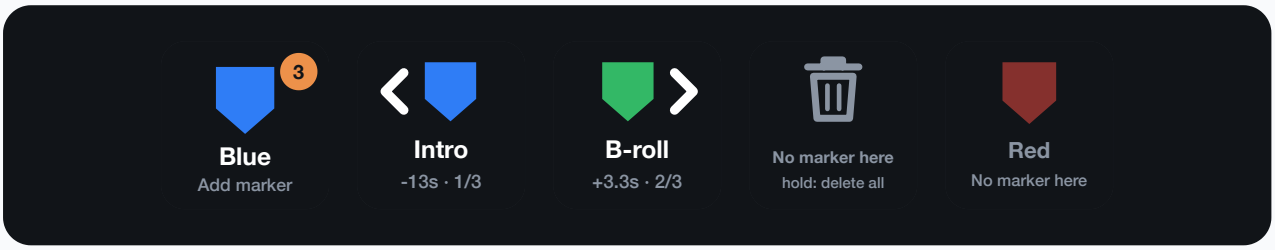

From left: Add Marker, Previous Marker, Next Marker, Delete Marker and Marker Color. Every key shows live information about the markers around the playhead.

How the Marker Keys Work

- **They are always up to date.** SpliceDeck reads the markers of the current timeline all the time. A marker you add or delete with the mouse shows on the keys straight away.
- **They know which marker you are on.** When the playhead is on a marker, or anywhere inside a marker that has a duration, the keys treat it as the marker "under the playhead".
- **They are frame accurate.** Add Marker and the Marker Dial note the frame at the moment you press, so a marker lands where you meant even while Resolve plays.
- **They work on the timeline or on a clip.** Each marker action has a setting called **Add to** or **Markers of**: leave it on **Timeline**, or choose **Clip under playhead (beta)** to use the markers of that clip instead.
- **They use Resolve's 16 marker colours:** Blue, Cyan, Green, Yellow, Red, Pink, Purple, Fuchsia, Rose, Lavender, Sky, Mint, Lemon, Sand, Cocoa and Cream. Colour menus in the settings have a row of swatches underneath, so you can pick by colour as well as by name.

NOTE Resolve only has a playhead on the pages with a timeline, so markers can be added on the Cut, Edit, Color, Fairlight and Deliver pages.



Add Marker KEY

Adds a marker at the playhead with the colour, name, note and duration you set up for the key. The key shows its colour, the name it will use and how many markers the timeline has. On a marker it lights up and shows that marker's name.

Press	Adds a marker at the frame where you pressed. To confirm, the key shows the marker dropping onto a ruler in its colour, with its name.
Hold	Opens Resolve's own Markers panel for the marker under the playhead, so you can type a name and notes. You can change this to delete the marker, or to do nothing. See **Holding Add Marker**.

Settings

SETTING	WHAT IT DOES
Color	The colour of new markers. Default `Blue`.
Hold the key	What holding the key does: `Open marker details (Resolve's Markers panel)` (default), `Delete the marker under the playhead` or `Nothing (add on key down)`.
Name	The name of new markers. You can use the placeholders on the next page. Leave it empty to number the markers **Marker 1**, **Marker 2** and so on.
Preview	Shows the name the next marker will get, worked out from your current timeline.
Note	Text saved in the marker's notes. The placeholders work here too, except `{n}`.
Duration (frames)	The length of the marker. Default 1. A marker that would run past the end of the timeline or clip is shortened to fit.
Add to	`Timeline` (default) or `Clip under playhead (beta)`.

NOTE Clip markers are a beta feature: on trimmed or retimed clips, a marker could land a few frames off. If you see this, please report it.

Name Placeholders

PLACEHOLDER	IS REPLACED WITH
`{n}`	A running number, one higher than the highest number already used with the same name. Numbering carries on after you delete markers and never repeats a name.
`{tc}`	The timecode of the marker.
`{color}`	The marker's colour, for example **Red**.
`{timeline}`	The name of the timeline.
`{clip}`	The name of the clip under the playhead.
`{frame}`	The frame number of the marker.

TIP Resolve does not accept a marker without a name, which is why an empty **Name** gives you **Marker 1**, **Marker 2** and so on. A name like `Fix {n}` gives **Fix 1**, **Fix 2**, and `{tc} check` gives a name such as **01:00:12:08 check**.

Holding Add Marker

Out of the box, holding Add Marker for half a second opens Resolve's own Markers panel, the same panel you get from **Mark > Modify Marker…** in Resolve's menu. It is the quickest way to name a marker or write a note while you watch.

1. Park the playhead on a marker. The Add Marker key lights up and shows the marker's name.
2. Hold the Add Marker key for about half a second. SpliceDeck brings Resolve to the front and opens its Markers panel for that marker.
3. Change what you need in the panel: **Time**, **Duration**, **Name**, **Notes**, **Keyword** and **Color**. You can also click **Remove Marker** to delete it.
4. Close the panel to go back to editing.

If there is no marker under the playhead when you hold the key, SpliceDeck first adds one with the key's settings and then opens the panel for it. So one long press both adds a marker and lets you name it.

Because SpliceDeck has to wait to see whether you are holding, a short press adds the marker when you let go of the key. It still places the marker on the frame where you pressed, so this makes no difference to where it lands. Resolve allows only one marker on each frame, so a press where there already is one shows **Marker exists**.

NOTE Opening the Markers panel works on macOS only, and needs the same Accessibility permission as Turbo Jog: **System Settings > Privacy & Security > Accessibility**, with **Elgato Stream Deck** switched on. Without it, or on Windows and Linux, the key shows **Marker panel: macOS + Accessibility**. On those systems, choose one of the other options below.

Other Hold Options

HOLD THE KEY	WHAT HAPPENS
Open marker details (Resolve's Markers panel)	The default, described above. Press adds a marker when you let go; hold opens the Markers panel.
Delete the marker under the playhead	Press adds a marker when you let go; hold deletes the marker under the playhead, and the key confirms with **Deleted** and the marker's name. This is how earlier versions of SpliceDeck worked, and keys you set up that way keep working like this.
Nothing (add on key down)	The key ignores holding and adds the marker the moment you press it down.


TIP Put two or three Add Marker keys side by side with different colours and names, for example a red `Fix {n}`, a yellow `Music {n}` and a green `Select {n}`. A review pass then becomes one press per note, and Next Marker can later jump through one colour at a time.

Adding a Marker While Resolve Plays

Resolve does not answer scripting requests while it is playing, so a normal marker request would have to wait. Add Marker notices playback and does it differently: it sends Resolve's own **Add Marker** shortcut (**M**) straight to Resolve at the moment you press, so the marker lands on exactly the frame you pressed on. When playback stops, SpliceDeck gives that marker the key's colour, name, note and duration.

- **Resolve must be in front.** If it isn't, the key shows an alert and nothing is added. This works on macOS with Accessibility permission, and on Windows.
- **It uses the physical M key.** If you have changed Resolve's Add Marker shortcut, or your keyboard layout is not QWERTY (AZERTY, for example), the key can't add markers during playback. It still works as usual when Resolve is stopped.
- **Holding does not open the Markers panel** during playback. The key only adds.
- **Selection Follows Playhead.** If **Timeline > Video > Selection Follows Playhead** is on in Resolve, Resolve puts the new marker on the selected clip or clips. SpliceDeck then turns those into one timeline marker on the same frame.

Keys set to **Clip under playhead (beta)** don't use this method.

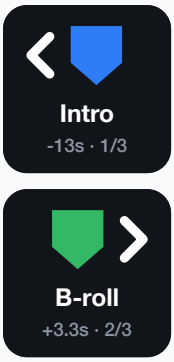

Next Marker and Previous Marker KEY

Move the playhead to the next or previous marker. Each key shows the marker it will jump to, how far away it is and its place among all markers, for example **+3.3s · 2/3**. At the ends the keys show **Last marker** or **First marker**.

Press	Jumps to the next or previous marker. Five quick taps move five markers.
Hold	Keeps jumping until you let go or run out of markers.

SETTING	WHAT IT DOES
Only color	Jump only to markers of this colour. Default `Any`. The key shows a dot in the chosen colour.
Markers of	`Timeline` or `Clip under playhead (beta)`.
Second line	`Distance · index` (default) or `Marker timecode`.



Delete Marker KEY

Deletes the marker under the playhead. The key shows a dustbin with the colour and name of that marker, or **No marker here**. Use **Edit > Undo** in Resolve to bring a marker back.

Press	Deletes the marker under the playhead, or the nearest one within the tolerance.
Hold, then press	Deletes every marker of the **Hold deletes** colour. The key turns red and shows, for example, **All Red: 4**. Press within 2 seconds to confirm.

SETTING	WHAT IT DOES
Tolerance (frames)	How close the playhead must be. Default 0: on the marker or inside its duration.
Hold deletes	The colour that hold, then press, deletes. `Any` deletes all markers.
Markers of	`Timeline` or `Clip under playhead (beta)`.



Marker Color KEY

Changes the colour of the marker under the playhead and keeps everything else about it. The key previews the change: the marker's current colour, an arrow and the new colour, with the marker's name underneath. If the marker already has that colour, the key says so, for example **already Red**.

Press	In **Set color** mode, gives the marker the key's colour. In **Cycle colors** mode, moves it on to the next colour in Resolve's order.
Hold	In **Cycle colors** mode, steps back to the previous colour. In **Set color** mode it does the same as a press.

SETTING	WHAT IT DOES
Mode	`Set color` (default) or `Cycle colors`.
Color	The colour to set. Default `Red`. Only shown in **Set color** mode.
Markers of	`Timeline` or `Clip under playhead (beta)`.

NOTE Resolve has no command for changing a marker's colour, so SpliceDeck removes the marker and adds it again in the new colour, with the same name, note, duration and custom data. In Resolve's undo history this counts as two steps, so choose **Edit > Undo** twice to go back.


In the rare case that Resolve refuses to add the marker again, SpliceDeck puts the original back. If even that fails, it keeps a copy of the marker and the key shows **Marker lost · press to restore**. The next press of Add Marker or Marker Color, or a push of the Marker Dial, adds the marker back to its timeline or clip and shows **Restored**.

TIP Give each colour a meaning and stick to it, for example red for fixes, yellow for sound notes and green for selects. Then set a Next Marker key to **Only color Red** to step from fix to fix, and a Marker Color key to **Green** to mark each one done.



Marker Dial DIAL STREAM DECK +

Everything you do with markers, on one dial. The touch strip shows where you are among the markers, the next marker and how far away it is, and a map of every marker on the timeline with the playhead.

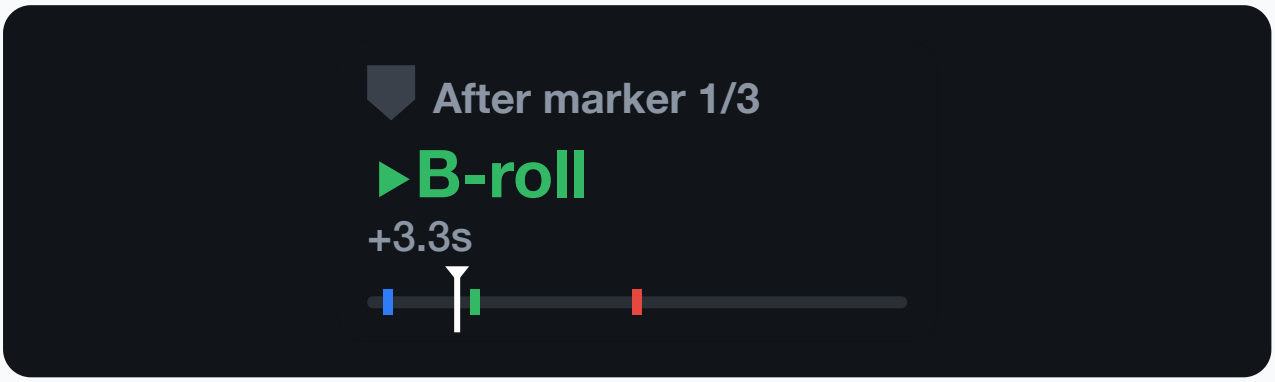

The Marker Dial's strip. The top line says where the playhead is, here **After marker 1/3**, or **Marker 2/3** when it is on one. Below are the next marker's name and distance, and the map of all markers.

Turn	Jumps from marker to marker, one marker per click. Turn quickly to skip several at once.
Push	Where there is no marker, adds one when you let go, placed on the frame where you pushed. On a marker, shows its full note, timecode, duration and colour for a few seconds instead.
Push and turn	On a marker, recolours it as you turn. Where there is no marker, picks the colour of the marker that is added when you let go; the strip shows **Release to add** and the colour.
Tap the strip	Jumps to the marker nearest the spot you tapped on the map.
Touch and hold	Gets ready to delete the marker under the playhead: the strip turns red and shows **Tap to delete**. Tap within 2 seconds to delete it, or wait and nothing happens.

TIP Put the Marker Dial next to the Playhead Jog dial. Spin the jog to find a moment, push the Marker Dial to mark it, and turn the Marker Dial to come back to it later.

Marker Dial Settings

SETTING	WHAT IT DOES
Color	The colour of markers added with a push. Default `Blue`.
Name, Preview, Note, Duration (frames)	The same as on Add Marker, including the name placeholders.
Only color	Turning and tapping only stop on markers of this colour. Default `Any`.
Markers of	`Timeline` or `Clip under playhead (beta)`. With a clip, the map shows just that clip.
Push + rotate	`Cycle colors` (default) steps through the colours as you turn, or choose one colour to set.
Touch strip	`Automatic` (default), `Also as dial image (OpenDeck)` or `Touch strip only`. See the note below.

NOTE OpenDeck shows the strip as the dial's image, and **Automatic** does this for you on Linux. If you use OpenDeck on macOS or Windows and the strip stays blank, choose **Also as dial image (OpenDeck)**.


Markers at a Glance

ACTION	PRESS	HOLD
Add Marker	Add a marker at the playhead.	Open Resolve's Markers panel (macOS), delete the marker, or nothing.
Next Marker	Jump to the next marker.	Keep jumping forward.
Previous Marker	Jump to the previous marker.	Keep jumping back.
Delete Marker	Delete the marker under the playhead.	Then press within 2 s: delete all markers of a colour.
Marker Color	Set or cycle the marker's colour.	Cycle backwards.
Marker Dial	Push: add a marker, or show its note. Turn: jump.	Touch and hold the strip, then tap: delete the marker.

Clips

The Clips group works on the clip under the playhead: cutting, colouring and flagging it, and on the Color page LUTs, grades, versions and stills.

There are ten actions: eight keys and two Stream Deck + dials, the **Clip Color Dial** and the **LUT Browser**. **Color Version** works on either.

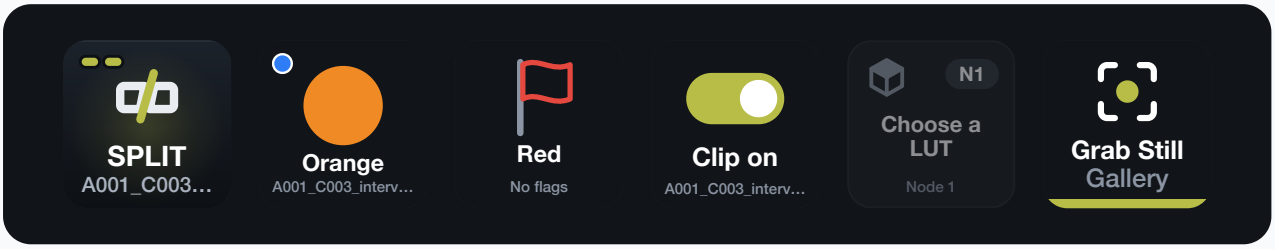

From left: Split / Ripple Delete, Clip Color, Clip Flag, Clip Enable, Apply LUT and Grab Still.

The Clip Under the Playhead

The clip actions work on the video clip Resolve treats as current at the playhead, normally the one on the highest track. The keys follow the playhead and show that clip's name, colour, flags, LUTs or versions, and dim with **No clip** when there is none. To grade clip by clip, set the Playhead Jog dial to **Turn: clip to clip** (see **Grading Clip by Clip**).

Choosing What a Key Applies To

Clip Color, Clip Flag and the Clip Color Dial have an **Apply to** setting:

APPLY TO	WORKS ON
Clip under the playhead	The current clip. The default, and the only target that lights the key up live.
Clip at the playhead on a video track	The clip at the playhead on the track you enter in **Video track**.
Selected media-pool clips	Every clip selected in the media pool, even before the project has a timeline. With none selected the key shows **Select bin clips**.

IMPORTANT Apply LUT, the LUT Browser, Apply Grade (DRX) and Color Version change the clip's grade. Use **Edit > Undo** in Resolve to go back.



Split / Ripple Delete KEY EDIT · CUT

Two of the most common edits on one key, with no settings to set up. The key shows **SPLIT** and the name of the clip under the playhead, or **hold: ripple del** as a reminder when there is no clip. On pages other than Edit and Cut the key is dimmed, and a press shows **Edit or Cut page**.

Press	Splits the clips at the playhead, exactly as if you chose **Timeline > Split Clips** in Resolve. The key confirms with **Split**.
Hold	Hold for half a second to ripple delete the clip under the playhead together with its linked audio. The gap closes, so everything after it moves up. The key confirms with **Ripple deleted** and the clip's name. When you hold, the split does not happen.

How Split Works on Each System

Resolve's scripting interface has no command for splitting clips, so SpliceDeck uses Resolve's own Split Clips command, sent on the same fast stream as Turbo Jog.

SYSTEM	HOW THE PRESS SPLITS
macOS	SpliceDeck chooses **Timeline > Split Clips** from Resolve's menu through Accessibility. No keystrokes are sent, so it works with any keyboard layout and shortcut set. It needs the Accessibility permission described in **Turning On Turbo Jog**; without it the key shows **Split: allow Accessibility**.
Windows	SpliceDeck sends `Ctrl+\`, Resolve's default Split Clip shortcut, while Resolve is in front. If you have changed that shortcut in Resolve, set it back for the key to work.
Linux	Splitting is not available.

Ripple Delete goes through Resolve's scripting interface, so it works on every system, Linux included.

NOTE On a locked track Resolve refuses the ripple delete: the key shows an error and nothing is removed. Both edits can be undone in Resolve with **Edit > Undo**.



Clip Color KEY

Gives the clip one of Resolve's 16 clip colours. The key shows the colour and the clip's name, and lights up when the clip already has that colour.

Press	Sets the clip's colour. With **Press again clears** on, pressing when the clip already has the colour clears it.
Hold	Clears the clip's colour.

SETTING	WHAT IT DOES
Color	Orange (default), Apricot, Yellow, Lime, Olive, Green, Teal, Navy, Blue, Purple, Violet, Pink, Tan, Beige, Brown or Chocolate. `Clear` makes a key that removes the colour.
Media pool too	Also colours the clip's source clip in the media pool. Off by default.
Press again clears	Makes the key an on and off switch for its colour. Off by default.
Apply to, Video track	Which clips the key colours. See **Choosing What a Key Applies To**.



Clip Flag KEY

Puts a flag on the clip. The key lights up when the clip has its flag, and shows a dot for every flag on the clip, or **No flags**. If Resolve refuses some of several clips, it shows, for example, **2/3 clips · Some refused**.

Press	Adds or removes the flag, depending on the **Press** setting.
Hold	Removes every flag from the clip.


SETTING	WHAT IT DOES
Flag	The flag colour. Red by default, or any of the 16 colours Resolve uses for flags and markers.
Press	`Toggle` (default) adds the flag, or removes it if it is there. `Add only` and `Remove only` never do the opposite, which is safer for many clips at once.
Apply to, Video track	Which clips the key flags. See **Choosing What a Key Applies To**.



Clip Color Dial

DIAL STREAM DECK +


All 16 clip colours on one dial. The touch strip shows the colour you have dialled in, the clip's current colour and its name. Nothing changes in Resolve until you push.

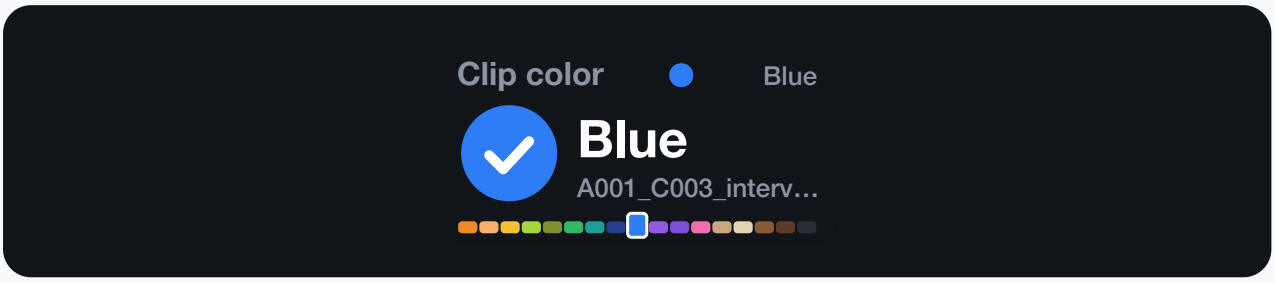

The Clip Color Dial's strip, with the colour dialled in and the clip it will colour.

Turn	Steps through the 16 colours and **Clear**. The strip previews each one. If you don't push, it goes back to the clip's own colour after 5 seconds.
Push	Applies the colour on the strip.
Touch	Clears the clip's colour.

SETTING	WHAT IT DOES
Media pool too	Also colours the source clip in the media pool.
Apply to, Video track	As on the Clip Color key. With another target, turning starts from the last colour you applied.




Clip Enable

KEY

Switches the clip under the playhead on and off. A disabled clip stays in the timeline, but Resolve skips it when you play. The key shows a switch with **Clip on**, or **Clip off** in amber, and the clip's name. It is lit while the clip is enabled, and has no settings.

Press	Switches the clip on or off.

TIP To compare two stacked takes, switch the top clip off to see the one underneath.



Apply LUT KEY GRADE

Puts a LUT on a node of the clip under the playhead. The key shows the LUT's name and the node, and lights up when that LUT is on that node. If the node has another LUT, the key names it, for example **Node 1: Rec709**. If the clip has fewer nodes, it warns **No node 3**.

Press	Applies the LUT. The key shows **Applying…** if Resolve takes a moment.
Hold	Depends on the **Hold** setting. By default it shows the LUT on the node now, or **No LUT**, and changes nothing.

SETTING	WHAT IT DOES
LUT	The LUT to apply. Start typing to choose from the LUTs Resolve knows. Use a path relative to Resolve's LUT folder, such as `Film Looks/My Look.cube`, or a full path.
Node	The node the LUT goes on. Default 1.
Refresh LUT list	On by default. If Resolve doesn't know the LUT yet but the file is in a LUT folder, Resolve refreshes its LUT list once and SpliceDeck tries again.
Rescan LUTs	Reloads the list of LUTs to choose from.
Hold	`Show the node's LUT` (default). `Rescan LUTs + re-apply` makes Resolve reread its LUT folders first, which picks up a LUT file you just edited. `Remove LUT (experimental)` tries to take the LUT off; Resolve's scripting does not officially support this, and if it refuses the key shows **Remove on Color page**.

Using a New LUT File

1. Copy the file into Resolve's LUT folder, or a subfolder of it: `/Library/Application Support/Blackmagic Design/DaVinci Resolve/LUT` on macOS, `C:\ProgramData\Blackmagic Design\DaVinci Resolve\Support\LUT` on Windows, or `/opt/resolve/LUT` on Linux.
2. In the key's settings, click **Rescan LUTs** and choose the new LUT.
3. Keep **Refresh LUT list** on and press the key. The first press can take a little longer while Resolve refreshes.


NOTE If a key shows **LUT not found**, check that the file really is in a LUT folder. SpliceDeck only asks Resolve to refresh when the file is there, and not again for the same LUT within a short time.



LUT Browser

DIAL STREAM DECK + GRADE

Browse every LUT Resolve knows on a dial, and apply the one you want to a node of the clip under the playhead. The strip shows the LUT you have dialled in, its place in the list, the node, and the LUT on the node now.

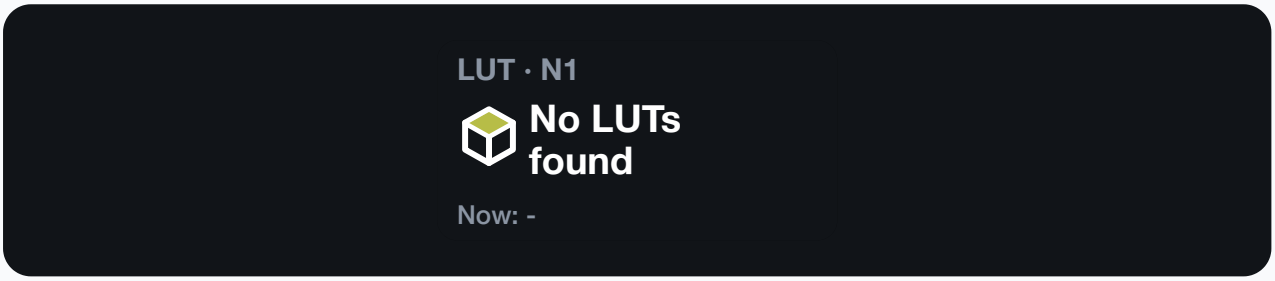

The LUT Browser's strip: the node (**N1**) at the top, and **Now:** the LUT on the node. This example has no LUTs installed yet.

Turn	Steps through Resolve's LUTs. Nothing is applied yet; the strip just previews the name. If you don't push, it goes back to the clip's current LUT after 6 seconds.
Push	Applies the LUT on the strip to the node. If you haven't turned to a LUT, nothing happens.
Push and turn	Chooses the node, from 1 up to the number of nodes the clip has.
Touch	Scans Resolve's LUT folders again and goes back to showing the clip's current LUT.

SETTING	WHAT IT DOES
Node	The node LUTs go on. Default 1. Pushing and turning the dial changes it too.
Refresh LUT list	As on the Apply LUT key.

TIP Audition looks with the LUT Browser, and keep an Apply LUT key for the LUT you use on every job, such as your camera's conversion LUT on node 1.



Grab Still KEY COLOR

Grabs a still into the current album of Resolve's gallery, and can export it to a folder at the same time. The key shows how many stills the album has and, under the title, the album's name, the export folder, or which frames it grabs.

Press	Grabs the still. The key confirms with the still's number, for example **#12** and **Still grabbed**, or **Exported** when it also saved a file.
Hold	Opens the export folder on your computer, and creates it if it doesn't exist yet.

SETTING	WHAT IT DOES
Grab	`Clip under the playhead` (default), `Every clip (first frame)` or `Every clip (middle frame)`. The last two grab one still per clip of the timeline, and the key's title becomes **Grab All**.
Outside Color page	`Never switch pages (default)` or `Hop to Color, grab, come back (switches Resolve's page)`. See the note below.
Export to	A folder to save the still to as well. Leave it empty to keep stills in the gallery only. **Use default folder** fills in a sensible folder for your system.
Format	PNG (default), JPEG, TIFF or DPX.
File prefix	The start of the exported file names. Empty uses the timeline's name and an underscore.

NOTE Resolve may only grab stills on the Color page. With **Never switch pages**, the key then says **Color page only** when you press it on the Edit or Cut page. To grab with one press from any page, choose **Hop to Color**: Resolve switches to the Color page for a moment, grabs, and switches back.

The export folder must be a full path; you can start it with `~` for your home folder. SpliceDeck checks that it can write to the folder before it grabs. If the grab works but the export fails, the key shows **Grabbed · Export failed**: the still is in the gallery, so don't press again or you get a second copy.




Color Version KEY DIAL GRADE

Steps through the colour versions of the clip under the playhead. The key shows the current version's name, the direction and its position, for example **Next · 2/4**. It is dimmed when the clip has fewer than two versions.

Press	Loads the next or previous version, as set in **Direction**.
Hold	Steps the other way.
Turn (dial)	Steps through the versions, one per click.
Push / Touch	On a dial: next version / previous version.

SETTING	WHAT IT DOES
Direction	`Next` (default) or `Prev`.
Versions	`Current type` (default) follows the type of the version the clip uses now; or choose `Local` or `Remote`.
Wrap around	On by default: after the last version comes the first. Off: the key stops and shows **No more versions**.



Apply Grade (DRX) KEY GRADE

Applies a saved grade to the clip under the playhead in one press. The key shows the grade file's name and the keyframe option, or **Choose a grade**.

Press	Applies the grade. The key confirms with **Grade applied**.

SETTING	WHAT IT DOES
Grade file	The full path to a `.drx` file. To make one, right-click a still in Resolve's gallery and choose **Export**.
Keyframes	`No keyframes` (default), `Source TC aligned` or `Start frames aligned`.

TIP A row of Apply Grade keys, one per look, makes a quick look palette for the Color page. If a file has moved, its key shows **Grade file missing**.

Tracks and Timelines

A busy timeline has many layers: picture and graphics on the video tracks, dialogue, music and effects on the audio tracks, and captions on the subtitle tracks. The track keys let you switch those layers on and off, lock them and isolate one of them without reaching for the track headers. The timeline keys take you between the timelines of your project and make a safe copy of the one you are working on.

This section describes the four track actions, followed by the four timeline actions.

How Track Keys Name Tracks

Every track key shows the short code Resolve uses in its track headers, followed by the real name of the track:

- **V1, V2 ...** for video tracks.
- **A1, A2 ...** for audio tracks.
- **S1, S2 ...** for subtitle tracks.


A key points at a track by its number, so **V2** always means the second video track of whichever timeline is open. If the open timeline has fewer tracks, the key shows **Missing** and how many tracks of that type the timeline has. Nothing happens when you press it.



Track On/Off. Lit while the track is enabled.



Track Lock. An open padlock until the track is locked.

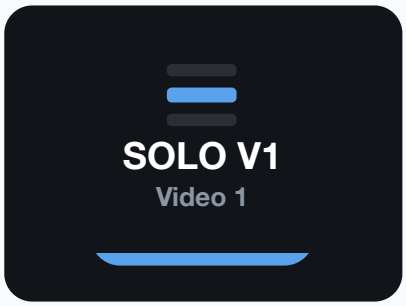

Track Solo / Isolate. Lights up while its track is the only one playing.

Following a Track by Name

When you add or delete tracks, the numbers of the tracks below move. If you want a key to stay with a particular track, for example your **Dialogue** track, switch on **Match by name** in the key's settings. The key then follows the track by its name wherever it moves, and shows **Missing** if no track has that name any more.

> **TIP** Give your important tracks real names in Resolve before you use **Match by name**. Resolve's default names such as **Video 2** are only positions, so they can't identify a track that moves.

Track Actions



Track On/Off KEY

Enables or disables a track, a group of tracks or every track of one type. The key shows the track code, the track's real name and **ON** or **OFF**. While the track is enabled the key is lit. While it is disabled the key is dark and the track code is struck through in red. A small padlock appears when the track is locked, and an **S** badge when the track is soloed by a Track Solo key or the Track Dial.

Press	Switches the track on or off, or does what you chose in **On press**.

Track On/Off Settings

SETTING	WHAT IT DOES
Track type	**Video**, **Audio** or **Subtitle**.
Controls	**One track**, **A group of tracks** or **Every track of the type**.
Tracks	For a group: the track numbers, for example `1-4, 6`. Pressing switches the whole group off when every track in it is on, otherwise it switches them all on.
Track	For one track: pick it from the list, which shows the live names of the open timeline, for example **A2 - Music**. Numbers the timeline doesn't have yet are marked **not in this timeline**, so you can set up keys for tracks you will add later.
Match by name	Follows the track by its name when tracks are added or deleted.
On press	**Toggle**, **Turn on** or **Turn off**.

With a group or every track of the type, the key shows the group and **ON**, **OFF** or how many tracks are on, for example **2/4 ON**. If some numbers in the group don't exist in the open timeline, the key says how many are missing.

TIP **Turn on** and **Turn off** are useful in Stream Deck multi-actions. One multi-action can, for example, switch on your dialogue group and switch off the music group, whatever state they were in before.

NOTE If Resolve refuses to change a track because it is locked, the key flashes **Locked** with a padlock. Unlock the track with Track Lock or in Resolve, then press again.



Track Lock KEY

Locks or unlocks a track. The key shows a padlock, the track code and the track's name. While the track is locked, the key is lit and the padlock is closed. If the track is also disabled, **OFF** appears in the top corner.

Press	Locks or unlocks the track, or does what you chose in **On press**.

Settings: **Track type**, **Track** and **Match by name** work as on Track On/Off. **On press** offers **Toggle**, **Lock** and **Unlock**.



Track Solo / Isolate KEY

Isolates one track: every other track of the same type is switched off, so only this track plays or shows. Press again and every track goes back exactly to how it was, including tracks you had already disabled before. Video and subtitle keys say **SOLO**. Audio keys say **ONLY**.

Press	Isolates the track. The key lights up and says **press to restore**.
Press again	Restores every track of the type to its state before the solo.

Settings: **Track type**, **Track** and **Match by name**, as on Track On/Off.

SpliceDeck remembers the restore point for each timeline, and keeps it when Resolve, the Stream Deck app or your computer restarts. Some things to know:


- When another track of the same type is soloed, the key shows that track in amber, for example **V2 soloed**. Pressing moves the solo to this key's track, and the original restore point is kept.
- If you switch tracks on or off by hand while a track is soloed, the key says **edited - restore kept**. Pressing still returns to the states from before the solo.
- If you add or delete tracks while soloed, a press restores what it can and flashes **Restored (tracks changed)**. Tracks it can't place safely keep their current state.

NOTE On audio, Track Solo / Isolate is not the solo button of the Fairlight mixer. Resolve's scripting interface has no access to the mixer solo, so the key works by disabling the other audio tracks instead. That is why audio keys say **ONLY**.



Track Dial DIAL

Puts a whole bank of tracks on one Stream Deck + dial. The touch strip shows every track of the chosen type as a row of chips, with its on, off and lock state, and the selected track's code, name and state above them. Timelines with many audio tracks get an extra overview row under the chips.

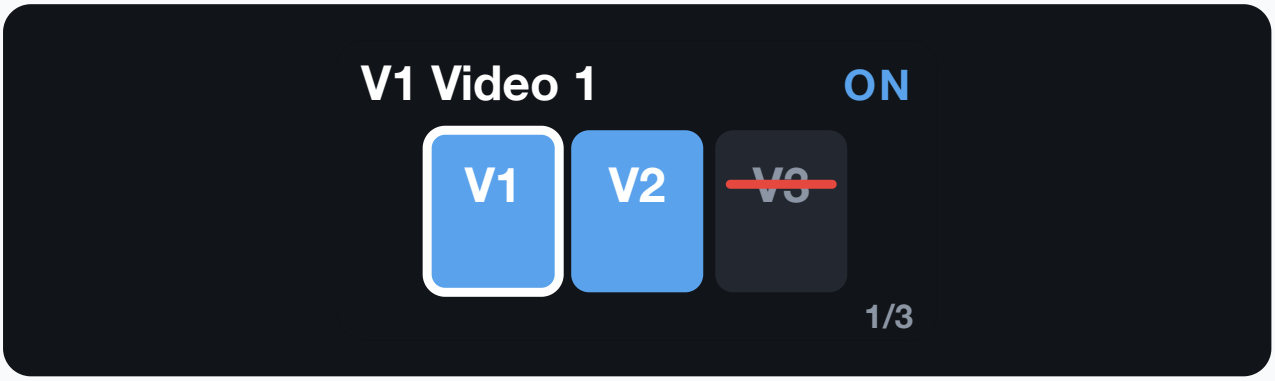

The Track Dial's touch strip on a timeline with three video tracks. V1 is selected and on, V3 is switched off.


Turn	Selects a track.
Push	Switches the selected track on or off.
Hold, then release	Solos the selected track, or restores the tracks if it is already soloed. While you hold, the strip shows what releasing will do, for example **Release: SOLO V2**. Turning the dial while you hold cancels the solo.
Push and turn	Turn right to lock the selected track, turn left to unlock it.
Tap a track	Selects that track. With large banks you can also tap the overview row.
Tap the header	Switches the dial between video, audio and subtitle tracks.
Long touch	Restores a solo. When nothing is soloed, the first long touch asks **Hold again: all video on**, and a second long touch within about two seconds switches every track of the type on.

Settings: **Track type** chooses the bank the dial starts with. The dial remembers the selected track between sessions.

TIP Hold and release is a quick way to check one track on its own. Hold the dial on your dialogue track, release to hear it alone, then hold and release again to bring everything back.

Timeline Actions

The timeline keys work with the timelines of the project that is open in Resolve. They never load a timeline you didn't ask for, and while Resolve is still opening a heavy timeline they show **Opening…** and ignore extra presses, so Resolve doesn't load the same timeline twice.



Switch Timeline KEY

Opens one particular timeline. The key shows the timeline's name and its position in the project, for example **2/5**. It lights up and says **Current** while that timeline is open. A new key says **Pick a timeline** until you choose one in its settings, and a key whose timeline isn't in the open project says **Not in project**.

Press	Opens the timeline. With **Press again to go back** switched on, pressing while the timeline is open returns to the timeline you came from.

SETTING	WHAT IT DOES
Match by	**This timeline (follows renames)** keeps the key on the timeline you pick, even when you rename it or the order of the timelines changes. **Position in the project** always opens the timeline at a given position, whatever project is open.
Timeline	The timeline to open, chosen from the timelines of the open project.
Position	For **Position in the project**: `1` for the first timeline, `2` for the second and so on.
Press again to go back	When on, the lit key shows where a second press goes, for example ← **Main Edit**. It is ignored inside multi-actions.

TIP **Position in the project** is ideal for template projects. If every project you build from a template has its social cut as the second timeline, one key opens it in all of them.

NOTE If Resolve takes a long time to load a timeline, the key shows **Still switching…** for a moment. The timeline still opens, and the key lights up as soon as Resolve has finished.



Next/Prev Timeline KEY

Steps through the timelines of the project in order. The key always shows the name of the timeline it will open, with an arrow and that timeline's position, for example → **2/3**. A press opens exactly the timeline shown on the key.


Press	Opens the next or previous timeline.

Settings: **Direction** is **Next** or **Previous**. **Wrap around** is on by default and jumps from the last timeline back to the first. With it off, the key shows **Last one** or **First one** at the end of the list. A project with a single timeline shows **Only timeline**.



Timeline Browser DIAL

Scrolls through your timelines on the touch strip without opening them, so scrolling past heavy timelines stays instant. The strip shows the highlighted timeline's position and name, its frame rate and duration, and a scroll bar. The header says **CURRENT** for the open timeline and **PRESS TO OPEN** in amber for any other.

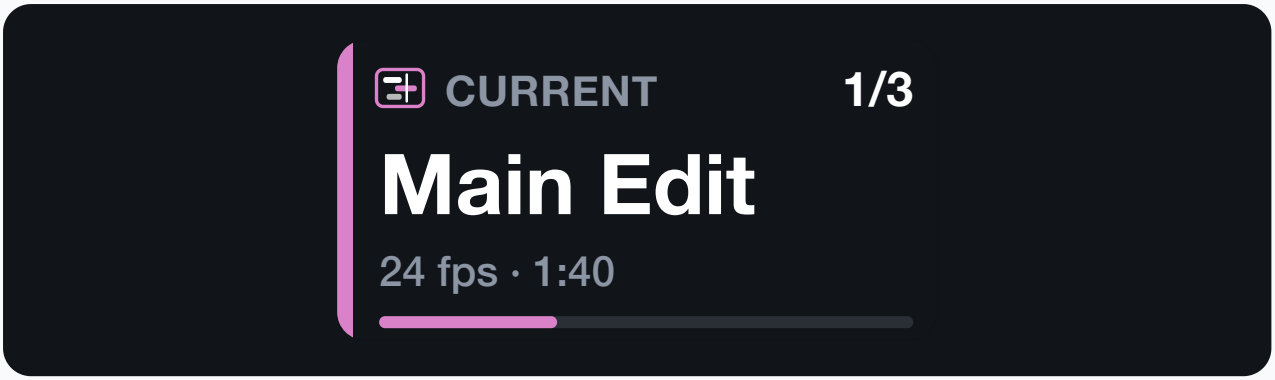

The Timeline Browser parked on the current timeline: first of three, 24 fps, 1 minute 40 seconds long.

Turn	Highlights the next or previous timeline, wrapping at the ends.
Push	Opens the highlighted timeline.
Touch	Jumps the highlight back to the current timeline.

SETTING	WHAT IT DOES
Rotate	**Browse, press to open** (default), or **Switch where rotation stops**, which opens the timeline you stop on.
Return to current after (s)	Seconds without turning before the highlight goes back to the current timeline. Default 8. `0` keeps the highlight until you touch the strip.
Only names containing	Lists only timelines whose names contain this text, for example `Social`. Upper and lower case don't matter.



Duplicate Timeline KEY

Makes a copy of the current timeline with one press, named as the next version: **Main Edit** becomes **Main Edit v2**, then **Main Edit v3**. Before you press, the key shows the name the copy will get. Afterwards it shows a green tick, the new name and **Created**, or **Opened** if the copy was opened.

Press	Duplicates the current timeline. Further presses are ignored until Resolve has finished the copy.

SETTING	WHAT IT DOES
Naming	**Next version (suffix)** or **Custom name template**.
Name suffix	Added to the timeline's name. Default `v{n}`.
Name template	The whole name of the copy, for example `{name} backup {n}` or `Safety {date}`.
Next name	A live preview of the name the next copy will get.
Open the copy	Opens the copy straight away. Off by default, so you keep working on the timeline you had open.

Names can use these tokens:

TOKEN	BECOMES
`{n}`	The next free number. SpliceDeck looks at every timeline in the project, so the numbering never repeats a version that already exists.
`{date}`	Today's date as YYYY-MM-DD.
`{name}`	The name of the current timeline (templates only).

Press Duplicate Timeline before every big change, such as a restructure or a round of client notes: the copy keeps the timeline as it was. Duplicating **Main Edit v3** with the default suffix gives **Main Edit v4**, not **Main Edit v3 v2**. If a name without `{n}` is already taken, SpliceDeck adds **(2)**, **(3)** and so on.

> **NOTE** **Created, not opened** in amber means the copy exists but Resolve couldn't open it. Don't press again, or you will get a second copy.

Rendering and Exporting

When the edit is done, the last step is getting it out of Resolve. The render keys start renders with your Resolve render presets, follow their progress and stop them, without leaving the page you are on. The export keys write everything else you hand over: timelines for other applications, frame grabs, stills, YouTube chapters and project backups.


This section describes the six render actions, followed by the five export actions.

Following a Render


Render keys show the progress of a render as a ring that fills up, with the percentage in the middle and the time remaining underneath. Render Status, Stop Render, Render Queue and the Render Dial follow any render, including renders you start yourself on Resolve's Deliver page. Render Preset and Quick Export show the progress of their own renders, and dim to **Busy** while something else is rendering.




Render Status while a render is 62% done, with 41 seconds to go.

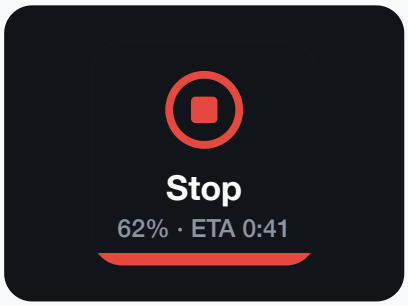

Stop Render turns red while something renders, with the progress underneath.

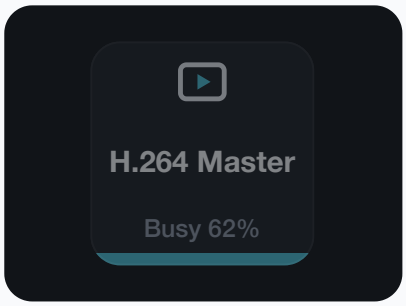

Render Preset dims to **Busy** while another render is running.

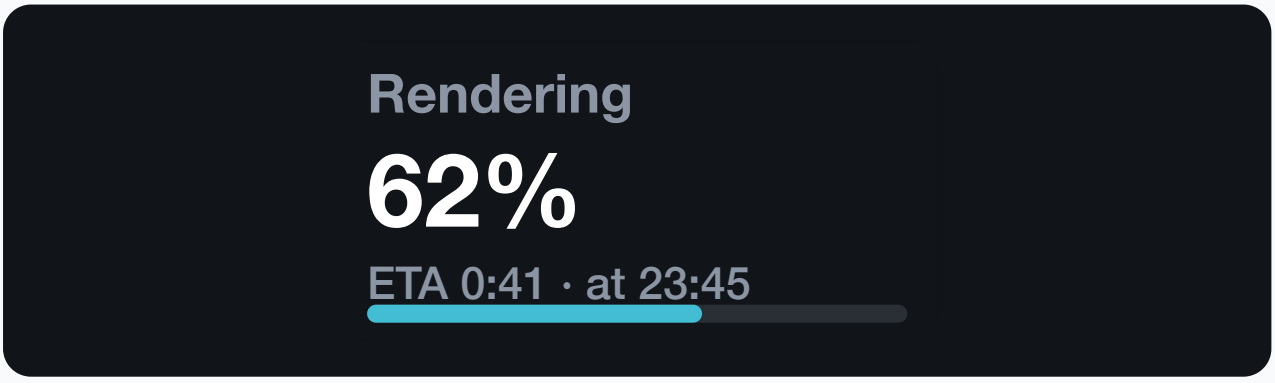

On Stream Deck +, the Render Dial's touch strip also shows the clock time the render will finish.

When a render finishes, its key shows **Done**, the render time and the time it finished, for example **Done 1m 12s at 14:05**. A failed render shows **Render failed**. Press the key once to dismiss the result.

Where Your Files Go

Every render and export key has a **Folder** setting. Leave it empty and the files go to the default export folder:

COMPUTER	DEFAULT EXPORT FOLDER
macOS	`~/Movies/SpliceDeck`
Windows	`%USERPROFILE%\Videos\SpliceDeck`
Linux	`SpliceDeck` inside your Videos folder, usually `~/Videos/SpliceDeck`

To use another default folder for every key, open the settings of any SpliceDeck key, expand **SpliceDeck settings** and type the folder in **Default export folder**. **Devices, Profiles and Settings** describes all of these settings.

- `~`, `%VAR%` and `$VAR` are expanded, so `~/Deliveries` works on every computer.
- A relative folder such as `Client A` is placed inside the default export folder. Missing folders are created.
- A folder with a variable your computer doesn't know is refused, and the key shows **Bad folder** instead of creating a folder with a strange name.


File Names

The **File name** setting is a template. These tokens are replaced when you press the key:

TOKEN	BECOMES
`{project} {timeline}`	The names of the open project and timeline.
`{preset}`	The render preset (render keys only).
`{date} {time}`	Today's date as YYYY-MM-DD, and the time as HHMMSS.
`{datetime}`	Both, joined: YYYY-MM-DD_HHMMSS.
`{fps} {tc}`	The timeline frame rate, and the timecode at the playhead with dashes instead of colons.
`{format}`	The export format (export keys only).

Nothing is overwritten unless you ask for it. When a file with the same name exists, render keys add **_2**, **_3** and export keys add **(2)**, **(3)**. Switch on **Overwrite** to replace the old file.

Render Actions



Render Preset KEY

Renders the current timeline with one of your Resolve render presets. One press loads the preset, sets the folder and file name, adds the job to the render queue and starts it. When idle, the key shows the preset's name and the range it renders, **Timeline** or **In/Out**. A **+** badge means the key only adds the job to the queue.

Press	Starts the render. The key shows **Starting…**, then the progress ring.
Press twice	While rendering, the first press turns the key red and asks **Stop?**. Press again within two seconds to stop the render.
Hold	Shows the rendered file in Finder, Explorer or your file manager.

The key tells you when something stops it from rendering:

THE KEY SHOWS	MEANING
Preset missing	The open project has no render preset with this name. Choose another preset, or save the preset in Resolve.
Already rendering	Resolve is already rendering. Wait for it to finish, or stop it first.
Set In/Out first	**Range** is **In/Out**, but the timeline has no In and Out marks.
Out → end	A mark lay outside the timeline, so the range was trimmed to the timeline. The render runs as normal.
Queued	**Queue only** is on: the job was added to Resolve's render queue with the file name shown, but not started.

NOTE Just like choosing a preset on Resolve's Deliver page, pressing Render Preset loads the preset into the project's render settings. If you have changed render settings by hand on the Deliver page, those changes are replaced.

Render Preset Settings

SETTING	WHAT IT DOES
Preset	The render preset, chosen from the presets of the open project. Click ↻ to reload the list after you have saved a new preset in Resolve. Default **H.264 Master**.
Range	**Whole timeline** or **In/Out**.
Folder	Where the file goes. **Browse…** opens a folder dialog, **Use default folder** empties the setting. The full folder is previewed underneath.
File name	The file name template. Default `{timeline}_{date}`.
Overwrite	Replaces an existing file with the same name. Off: the new file gets **_2**, **_3** and so on.
Queue only	Adds the job to Resolve's render queue without starting it.
Open Deliver	Switches Resolve to the Deliver page when the render starts.
Clean up	Removes this key's job from the render queue once it is complete. Failed jobs stay, so you can retry them.

TIP Put several Render Preset keys side by side with **Queue only** switched on, for example a master, a review copy and a social version. Press each one to queue its job, then press **Render Queue** to render them all in one go.

TIP Use **Range In/Out** to send a client one scene. Mark In and Mark Out around the scene, then press the key.

If the Stream Deck app restarts while a render is running, Render Preset picks up its render again and carries on showing the progress.



Quick Export KEY

Puts Resolve's Quick Export presets on a key, such as H.264 Master, YouTube or Vimeo, with SpliceDeck's file name templates and folders. The key shows the preset's name and **Quick Export**.

Press	Starts the export.
Press twice	While exporting, the first press asks **Stop?**, the second press within two seconds stops the export.
Hold	Shows the exported file, or the folder if the file isn't there yet.

Two Ways to Export

Resolve's own Quick Export reports no progress and makes the computer wait until it is finished. SpliceDeck avoids both problems where it can, so the deck always stays responsive:

- **Live progress.** Five Quick Export presets also exist as render presets: **H.264 Master**, **H.265 Master**, **ProRes 422 HQ**, **HyperDeck** and **Presentations**. With these, the key runs a normal render job, with the progress ring, the time remaining and the option to stop. Like Resolve's Quick Export, it renders the In/Out range when both marks are set, and the job leaves the render queue once it is complete.
- **Resolve Quick Export.** Presets that only exist in Quick Export, such as YouTube, Vimeo and TikTok, run Resolve's own Quick Export in the background. The key shows a spinner and the time since the export started.

Stopping a Resolve Quick Export is best effort, because Resolve doesn't let scripts cancel it. The key shows **Stopping…** until Resolve is idle again. If Resolve carries on, the key says **Still busy** and **stop in Resolve**, so you can stop it there.

> **NOTE** The Resolve Quick Export mode has not yet been verified against a live export. The live progress mode uses the same render path as Render Preset.

Quick Export Settings

SETTING	WHAT IT DOES
Preset	The Quick Export preset. Click ↻ to reload the list. Default **H.264 Master**.
Folder	Where the file goes, with **Browse…** and **Use default folder**, as on Render Preset.
File name	The file name template. Default `{timeline}`.
Overwrite	Replaces an existing file with the same name.
Progress	**Live % + ETA when possible** (default) uses a render job for the five presets above. **Always Resolve Quick Export** always uses Resolve's Quick Export and leaves the project's render settings untouched.
Keep job	With live progress: keeps the job in Resolve's render queue after it is complete.

NOTE With **Live % + ETA when possible**, the preset is loaded into the project's render settings, just as on the Deliver page. Choose **Always Resolve Quick Export** if you want your render settings left exactly as they are.



Render Queue KEY

Shows Resolve's render queue and renders it. When idle, the key shows how many jobs are waiting and how many are done, for example **2 ready · 3 done**, with the number of waiting jobs in a badge. An empty queue shows **Empty**, and a queue with only finished jobs shows **All done**. While rendering, the key shows the progress ring with the job's name, or **Job 2/4** when it is rendering several jobs it started.

Press	Renders every job that is waiting, including failed and cancelled jobs. The key confirms with **Started 3**.
Hold	Removes completed jobs from the queue, for example **Cleared 4**.

Render Queue has no settings.




Stop Render KEY

Stops the current render. The key is dim and says **Not rendering** while nothing renders. As soon as a render starts, it turns red and shows the progress and time remaining, or **Quick Export** while a Quick Export runs.

Press	Stops the render straight away. Pressing while nothing renders only shows Stream Deck's alert.

Stop Render has no settings.

IMPORTANT Stop Render doesn't ask for confirmation. Keep it away from keys you press often, or use the double press on Render Preset, Quick Export and the Render Dial instead.



Render Status KEY

Follows every render, including renders started on Resolve's Deliver page. While rendering it shows the progress ring with the timeline's name and the time remaining. When idle it shows **Idle** and **No render**, or how many jobs are waiting in the queue. After a render it shows **Done** with the render time and the clock time it finished, or **Render failed**.

Press	While rendering, shows the clock time the render will finish, for example **Ends 14:32**. After a render, dismisses the result.
Hold	Shows the rendered file in Finder, Explorer or your file manager.

Render Status has no settings.

When Resolve renders something that isn't in its render queue, for example a Quick Export started from Resolve's own menu, there is no percentage to show. Render Status then shows a spinner, **In Resolve** and the time since it started.

TIP Render Status is worth a key on every page of your profile. Start a long render, switch to another Stream Deck page and carry on working, and you can still see at a glance how far the render has got.



Render Dial DIAL

A render console on one Stream Deck + dial. When idle, the touch strip shows the highlighted preset and its position in your list, for example **Render 1/3**, with the format and range underneath. While rendering, it shows the progress, the time remaining and the clock time the render will finish, for any render, including ones started in Resolve.



The Render Dial with the first of three presets highlighted, ready to render the whole timeline.

Turn	Picks a preset. Turning does nothing while a render is running.
Push	Renders with the highlighted preset.
Push twice	While rendering, the first push asks **Stop render?**. Push again within three seconds to stop it.
Tap the strip	Shows the file name, folder and range the next render will use.
Hold or long touch	Shows the rendered file in Finder, Explorer or your file manager.

After a render, the strip shows **Done** with the finish time, the render time and the file name, or **Render failed**. Push, tap or turn the dial to dismiss it.

Render Dial Settings

The Render Dial has the same **Range**, **Folder**, **File name**, **Overwrite**, **Queue only**, **Open Deliver** and **Clean up** settings as Render Preset. Its file name template is `{timeline}_{preset}` by default, so each preset gets its own file.

Instead of one preset, it has **Favourites**: tick the presets the dial cycles through. With none ticked, the dial cycles through every render preset of the project. Click **↻** to reload the list from Resolve.

Exporting Files

The export keys write files from your project without changing the project itself. They all work the same way:

- **Press** to export. The key shows **Exporting…** with the time it has been running, then flashes **Exported** with the file name, or **Export failed** with the reason.
- **Hold** to show the last exported file in Finder, Explorer or your file manager. This also works while Resolve is closed.
- A small green tick on the key means it has exported a file before, so there is something to show when you hold it.

The settings of every export key end with a **Will write** preview. It shows the full path of the file the next press will write, and warns about problems before you press, such as a variable your computer doesn't know or a folder that can't be written to. Next to the **Folder** setting, **Choose…** opens a folder dialog. **If file exists: overwrite** replaces a file with the same name. When it is off, the new file gets **(2)**, **(3)** and so on.

While an Export Runs

Large exports, such as a project backup with stills or a long AAF, can keep Resolve busy for a while. While Resolve is busy it doesn't answer anything else, so:

- Live keys such as the timecode and marker keys pause until the export ends.
- Keys that would change something in Resolve show **Busy** straight away instead of waiting. Nothing you press is carried out later by surprise.
- The other export keys show what is running, for example **Busy: Backup**.

If an export takes longer than expected, the key shows **Still exporting…** and keeps waiting for Resolve to finish, so you never get a false failure or a duplicate file.

> **TIP** Start long exports when you are about to take a break. The deck tells you with a flash and a green tick when the file is ready.

Export Actions



Export Timeline KEY DIAL

Exports the current timeline, a timeline by name or every timeline of the project as an interchange file, for example FCPXML for Final Cut Pro, an EDL or an AAF for Avid. The key shows the format and the timeline it will export, for example **FCPXML** and **1.10 · Main Edit**.

Press	Exports the timeline.
Hold	Shows the last exported file.
Turn	On a dial: picks the format.
Push	On a dial: exports the timeline.
Touch	On a dial: shows the last exported file.

SETTING	WHAT IT DOES
Format	The export format. See the list on the next page.
Timelines	**Current timeline**, **Timeline by name** or **Every timeline (one file each)**.
Timeline name	For **Timeline by name**: the timeline to export.
Folder, File name	Where the file goes and its name. Default `{timeline}_{date}`.
Dial formats	On a dial: the formats it cycles through. None selected means every format this project can export.

Export Timeline never switches the current timeline, even when it exports another one. **Every timeline (one file each)** writes one file for each timeline, named with `{timeline}`. If your template doesn't contain `{timeline}`, the timeline's name is added at the end. The key then flashes how many timelines it exported, for example **3 timelines**.

Timeline Export Formats

GROUP	FORMATS
Final Cut / Premiere	FCPXML 1.10, FCPXML 1.9, FCPXML 1.8, FCP 7 XML (.xml)
EDL	EDL (CMX 3600), EDL with CDL, EDL with SDL, EDL of missing clips
Avid	AAF (new media), AAF (existing media), ALE, ALE with CDL
Other	OpenTimelineIO (.otio), DaVinci Resolve Timeline (.drt), CSV edit list, Tab-separated edit list (.txt)
HDR metadata (.xml)	HDR10+ Profile A, HDR10+ Profile B, Dolby Vision 2.9, Dolby Vision 4.0, Dolby Vision 5.1

Formats your version of Resolve doesn't offer are marked **not in this Resolve** in the list and can't be chosen.



Export Timeline on a Stream Deck + dial: turn to change the format, push to export Main Edit.

NOTE HDR10+ and Dolby Vision metadata only exist when those controls are switched on in the project, on the Color page. Until they are, the key warns you before you press with **HDR10+ off** or **Dolby Vision off** in amber, and a press fails with **Needs HDR grade**. Unless you choose them as dial formats, the dial skips these formats while they can't export anything.

TIP Put three or four formats you send often in **Dial formats**, for example FCPXML 1.10, EDL and AAF. One dial then covers every hand-over to another suite.



Export Frame KEY

Saves the frame under the playhead as an image file. The key shows **Frame** and the image format. After a press it flashes the timecode of the frame it saved.

Press	Saves the frame.
Hold	Shows the last saved frame.

Settings: **Format** is PNG, JPEG, TIFF, DPX or BMP. **File name** defaults to `{timeline}_{tc}`, where `{tc}` is the timecode of the exact frame that was saved. **Folder** and **If file exists: overwrite** work as described above.

NOTE Resolve can only save the current frame on a page with a timeline viewer: Cut, Edit, Color, Fairlight or Deliver. On the Media and Fusion pages the key flashes an error.



Export Stills KEY

Exports every still in the current album of Resolve's gallery. The key shows how many stills the album holds, for example **12 stills**, with the album name and the format. It shows **No album** when the project has no current album.

Press	Exports all stills of the album.
Hold	Opens the folder the stills went into.

SETTING	WHAT IT DOES
Current album	Shows the album and its number of stills. Change the album in Resolve's gallery.
Format	PNG, JPEG, TIFF, DPX, DRX (grade), Cineon or BMP.
File prefix	Added to the start of every file name. Default `{project}_`.
Replace earlier stills with this prefix	Off: a second export uses **prefix(2)**_, so earlier stills are never replaced.

To grab one new still and export just that one, use the clips group's Grab Still key instead.



Export Chapters KEY

Turns the markers of the current timeline into a chapter list, ready for a YouTube description, a spreadsheet, a document or a video file. Each marker's name becomes the chapter title. The key shows the style and how many markers it will use, for example **3 markers**.

Press	Writes the chapter file.
Hold	Shows the last chapter file.

SETTING	WHAT IT DOES
Style	**YouTube chapters (0:00 Title)** as `.txt`, **Marker CSV** as `.csv`, **Markdown list** as `.md`, or **FFmpeg metadata (mux into MP4/MKV)** as `.ffmeta`.
Marker color	**Any**, or one marker colour, so you can keep chapter markers apart from your notes.
Folder, File name	Where the file goes and its name. Default `{timeline}_chapters`.

Below the settings, a text box shows the chapters exactly as they will be written. Click **Copy** to copy them, for example straight into a YouTube description, or **Refresh** after you have changed markers.

YouTube Chapter Rules

YouTube only shows chapters that follow its rules. SpliceDeck applies them for you and tells you when your markers don't fit:

- The first chapter must start at 0:00. A first marker within 10 seconds of the start is moved to 0:00. Otherwise SpliceDeck adds an **Intro** chapter at 0:00.
- YouTube needs at least 3 chapters. With fewer, the key flashes **Need 3+ chapters**.
- Chapters must be at least 10 seconds apart. If two are closer, the key flashes **Under 10 s apart**.
- Two markers on the same second are merged and the key flashes **Markers merged**.

The CSV style has a row for each marker with its timecode, time, frame, colour, name, note and duration.



Export Project Backup KEY

Saves a timestamped backup of the current project as a `.drp` file, which you can import into any Resolve. The key shows **Backup** and the project name, and after the first backup the time it was made, for example **Backup 14:05**. With **Save the project before the backup** switched on, the key says **Save+Backup**.

Press	Writes the backup.
Hold	Shows the last backup file.

SETTING	WHAT IT DOES
Folder, File name	Where the backup goes and its name. Default `{project}_{datetime}`, so every backup gets its own file.
Include stills and LUTs	Adds the project's gallery stills and LUTs to the backup. The key shows **+stills**. Off by default, because it makes the backup much slower.
Save the project before the backup	Saves the project first, like pressing Cmd+S or Ctrl+S, so the backup includes your latest changes.

IMPORTANT Resolve backs up the project as it was last saved. Unless **Save the project before the backup** is on, changes you haven't saved yet are not in the backup, and the key's flash says **Last saved state** to remind you.

NOTE The project must be in the folder that is currently open in Resolve's Project Manager. If the backup fails, open the Project Manager, go to the folder that contains the project and press again.

A backup with stills can take minutes. Meanwhile the key shows the time it has been running, and the other keys behave as described in **While an Export Runs**.


TIP Press Export Project Backup at the end of each day, with the folder set to a drive that is backed up or synced. You then have a dated copy of the project for every day of the job.

Project, Pages and Layout


Some of the things you do most often in Resolve have nothing to do with a particular clip: moving between pages, saving, checking the project's frame rate before an export, or restoring the window layout you like for grading. The core keys put these on the deck, together with Resolve Status, which shows whether SpliceDeck is connected.

This section describes switching pages, saving, project information and settings, the Context Key, layout presets and keyframe modes, and ends with a reference for the Resolve Status key. Live Timecode also belongs to this group and is described in **Navigating the Timeline**.

Switching Pages

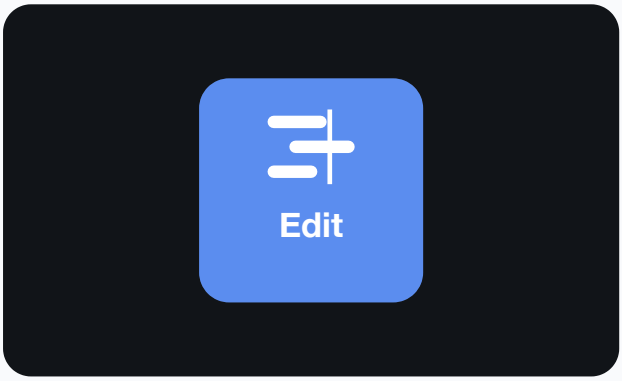

Switch Page set to the Edit page, lit because the Edit page is open.

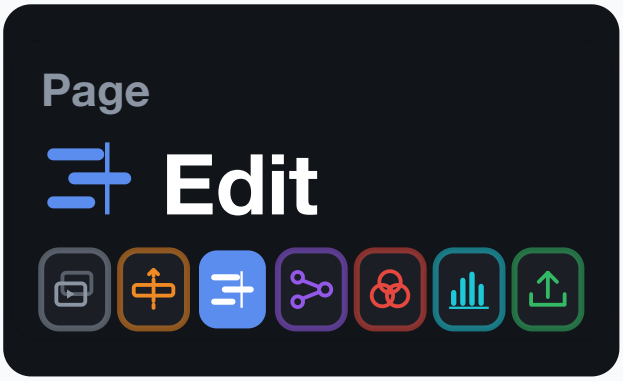

Page Dial on Stream Deck +: the current page and a ribbon of every page in the rotation.



Switch Page KEY

Opens one Resolve page. The key shows the page's name and symbol in that page's colour, and lights up while the page is open, even when you change pages with the mouse. While a heavy page such as Fusion or Color is loading, the key stays lit and says **loading…**.

Press	Opens the page. With **Toggle back** on, pressing while the page is open returns to the page you came from.

Settings: **Page** is **Media**, **Cut**, **Edit**, **Fusion**, **Color**, **Fairlight** or **Deliver**. With **Toggle back** on, the lit key shows where a second press goes, for example ← **Edit**.



Page Dial DIAL KEY


Moves through Resolve's pages with one dial. The touch strip shows the current page and a ribbon of all the pages in the rotation, with the current one lit. Every click of the dial moves the ribbon at once, but Resolve only opens the page you stop on, so spinning from Edit to Deliver doesn't load Fusion and Color on the way. A single click opens its page straight away.

Turn	Opens the next or previous page in the rotation.
Push	Opens the page chosen in **Press opens**, for example your main editing page.
Tap a page	Opens the page you tap on the ribbon.
Press	On a key: opens the next page in the rotation. The key shows the current page and the next one, for example **Edit** and **→ Fusion**.
Hold	On a key: opens the page chosen in **Press opens**.

SETTING	WHAT IT DOES
Pages	The pages in the rotation. Ctrl-click or Cmd-click to choose several. None selected means all pages.
Press opens	The page a push opens. Default **Edit**.
Rotation	**Opens the page it stops on** (default), or **Only selects (push opens)**, where turning only moves the highlight and a push opens the selected page.
Touch strip	**Automatic (text on Linux / OpenDeck)**, **Graphic** or **Text only**.

TIP Most edits only use a few pages. Select just **Edit**, **Color**, **Fairlight** and **Deliver** in **Pages**, and every click of the dial lands on a page you need.

Saving Your Project



Save Project KEY

Saves the current project. The key shows **Save** and how long ago the deck last saved this project, for example **deck save 4m ago**. Before the first save from the deck it says **no deck save yet**.

Press	Saves the project. The key shows **Saving…**, then **Saved** with the time.
Hold	Stops every Auto-Save that is running, including Auto-Save keys on other Stream Deck pages. When no Auto-Save is running, a hold saves the project like a press.


Settings: **Show age** shows or hides the time since the last deck save. **Amber after (min)** turns the key amber with a **!** badge when the last deck save is older than this. It is `0`, which means off, by default.

NOTE Resolve's scripting interface can't see saves you make with Cmd+S or Ctrl+S, with Live Save or with Resolve's own auto save. That is why the key says **deck save**: it counts only saves made by Save Project and Auto-Save keys. The time is remembered for each project, even when you restart.

If a save takes longer than 90 seconds, for example on a very large project or a slow database, the key shows **Still saving…** and **Resolve is busy**. This isn't an error: Resolve carries on saving.

While any Auto-Save is running, the Save Project and Resolve Status keys show an **AUTO** badge with the number of Auto-Saves. The badge turns amber when one of them is on a Stream Deck page you can't see.

TIP If you always save from the deck, set **Amber after (min)** to, for example, `15`. The key turns amber to remind you when it is time to save again.



Auto-Save KEY

Saves the project at a regular interval. While it is off, the key is dim and shows **Off** and the interval, or the time since the last deck save. While it is on, the key shows **AUTO**, a countdown ring and the time to the next save, for example **4m**, then **45s** in the last minute.

Press	Switches Auto-Save on or off.
Hold	Saves the project now.

SETTING	WHAT IT DOES
Every (min)	Minutes between saves, from 1 to 60. Default 5.
Keep saving when hidden (min)	How long the key keeps saving while it is on a Stream Deck page or profile you can't see: `0`, `10`, `30`, `60` or `240` minutes. Default 10. With `0` it pauses as soon as it is hidden. When the time is up, it waits until you show the key again.


Auto-Save never interrupts you. It waits, and tells you why under the countdown, while:

THE KEY SHOWS	AUTO-SAVE IS WAITING BECAUSE
rendering	Resolve is rendering. The ring turns amber and the countdown says **paused**.
playing	The playhead is moving, for example during playback or recording.
untitled	The project is still called **Untitled Project**. Save it once with a name.
slow save	The last save is still running.
waiting	Resolve isn't connected.
retrying	The last save failed. The ring turns red and Auto-Save tries again.

Auto-Save keeps its state when you restart, and several Auto-Save keys never save twice at the same moment.

NOTE Stream Deck reports a deleted key in the same way as a hidden one. **Keep saving when hidden (min)** is what stops a deleted Auto-Save key, so keep it short. To stop every Auto-Save at once, hold Save Project.

Project Information



Project Info KEY

Shows the details of the open project on five cards. The dots at the top of the key show which card you are on.

Press	Shows the next card. With **Pin to this card** on, a press refreshes the card instead.
Hold	Reads the details from Resolve again and flashes **Refreshed**.

CARD	SHOWS
Project and database	The project's name and the database it is stored in.
Timeline	The current timeline and how many timelines the project has.
Frame rate	The timeline frame rate, with **DF** for drop frame, and the timeline's start timecode.
Resolution	The timeline resolution and its aspect ratio, for example **1920×1080** and **16:9**.
Color science	The project's colour science, for example **DaVinci YRGB**, and the timeline colour space.

Settings: **Card** chooses the card the key shows. The key remembers the last card you pressed to. **Pin to this card** keeps the key on that card. The settings also show all the details on one line.

> **TIP** A Project Info key pinned to **Frame rate** next to your render keys is a quick check before every delivery: you see straight away whether the timeline is 23.976 or 25 fps.

The details update by themselves when you open another project or timeline. If Resolve can't report a value, the card shows **unavailable** and SpliceDeck tries again a little later.

Project Settings



Project Settings KEY

Opens Resolve's **File > Project Settings…** window, where you set frame rate, resolution and colour science. The key shows the name of the open project.

Press	Opens the window. On macOS SpliceDeck brings Resolve to the front first.

Resolve's scripting interface can't open this window, so SpliceDeck uses Resolve's own menu. On macOS it needs the same Accessibility permission as Turbo Jog; without it the key shows **Settings: allow Accessibility**. On Windows it sends Resolve's default shortcut, **Shift+9**.

NOTE While Project Settings is open, Resolve pauses all scripting, so the other keys wait or show **Offline** until you close the window.

Context Key



Context Key KEY

A key that becomes a different action on each Resolve page. Put eight Context Keys on a Stream Deck page, give them slots 1 to 8, and one page of keys serves Media, Cut, Edit, Fusion, Color, Fairlight and Deliver. It follows the page as soon as it changes, including while the Page Dial is still turning.


Press, hold	Do whatever the action it is showing does. The key behaves exactly as that action does on its own key.

SETTING	WHAT IT DOES
Slot	1 to 8. Each slot has a default action on every page. Slot 1, for example, is Split on Edit and Cut, Grab Still on Color, Track On/Off on Fairlight and Render Preset on Deliver.
Media, Cut, Edit, Fusion, Color, Fairlight, Deliver	Optional. Pick another action for that page, or `Blank` for an empty key.

The action on a Context Key uses its default settings. If you need an action with custom settings, such as a coloured Add Marker, put that action on its own key.

TIP Context Keys are an alternative to the bundled SpliceDeck profile for one-page layouts, or for Stream Deck models without dials. The profile gives every page its own full layout; Context Keys give you one layout that adapts.

Layouts and Keyframes



Load Layout Preset KEY

Loads one of the user interface layouts you have saved in Resolve under **Workspace > Layout Presets**, or steps through a list of them. The key shows the preset's name. The key whose preset was loaded last from the deck is lit and says **loaded**. A new key says **Set a preset name**.

Press	Loads the preset, or the next preset of the **Cycle list**.

SETTING	WHAT IT DOES
Preset name	The exact name of the layout preset, for example `Grading 2-up`. Names you have loaded before are suggested as you type.
Cycle list	Optional: one preset name per line. Each press loads the next preset of the list, and the key shows its position and the next name, for example **1/3 · next: Audio**.

Resolve's scripting interface can't list layout presets, so you type the name yourself. Upper and lower case matter. If Resolve doesn't find the name, the key flashes **Preset not found**, and the settings remind you to check the spelling next time you open them.



Keyframe Mode KEY BETA

Sets Resolve's keyframe mode to **All**, **Color** or **Sizing**. This action is experimental and marked **BETA** on the key.

Press	Sets the mode chosen in **Press**, and flashes the mode.

Settings: **Press** is **Cycle All → Color → Sizing**, **Set All**, **Set Color** or **Set Sizing**.


Resolve 20 doesn't tell scripts which keyframe mode is active, and a mode you choose with the mouse in Resolve can't be seen by SpliceDeck. So the keys never claim to know the current mode:

- A key that sets one mode shows the mode and **set mode**. When that mode was the last one set from the deck, it says **set from deck** and its marker underneath is drawn as an outline.
- A cycling key shows **Mode ?** and the last mode set from the deck, for example **last set: Color**. Before the first press it shows **Keyframes** and **press: All**.
- A key lights up only if your version of Resolve reports the mode.


> **TIP** Put three Keyframe Mode keys side by side, set to **Set All**, **Set Color** and **Set Sizing**. The one you pressed last is marked, so you can see at a glance which mode you chose.

Resolve Status Reference


Getting Started describes how to use Resolve Status to check the connection. This is a summary of everything the key can show.

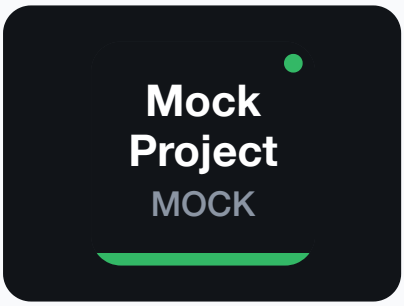

Connected. The project name, with a green dot.

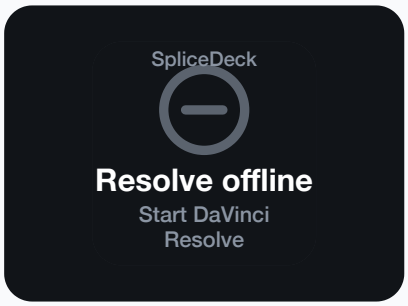

Resolve offline. Start DaVinci Resolve.

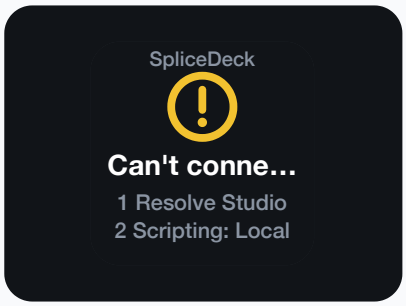

Can't connect. Check you have Resolve Studio, with external scripting set to Local.



Resolve Status KEY

Shows whether SpliceDeck is connected to Resolve. When connected, the key shows the project, timeline, page or Resolve version, with more detail underneath and a dot in the corner. The dot is green for DaVinci Resolve Studio. It turns amber, with **Not Studio**, if Resolve reports that it isn't the Studio edition.

Press — When offline, tries to connect straight away. When connected, flashes **Connected** with the Resolve edition and version. A press never drops a working connection.

Hold — Shows diagnostics. When connected: the time Resolve takes to answer and how often SpliceDeck reads it. When offline: the exact reason, for example which file SpliceDeck tried. When scripting is off: a reminder to check for Studio under **Help > About**.

Settings: **Show** is **Project**, **Timeline**, **Page** or **Resolve version**.

Resolve Status also tells you what the deck is doing in the background:

BADGE	MEANING
AUTO 2	Two Auto-Save keys are running. Amber when one of them is on a page you can't see. Hold Save Project to stop them all.
Saving…	A save from the deck is running.
Loading page…	Resolve is still opening a page you asked for.
Loading layout…	Resolve is still loading a layout preset.

When SpliceDeck can't reach Resolve, every other key shows the reason too, for example **Offline** or **Script off**, and recovers by itself once the problem is solved. **Help and Troubleshooting** lists every state and how to fix it.

TIP Set **Show** to **Timeline** if you often work with several timelines. The Status key then doubles as a reminder of which timeline you are working on.

Devices, Profiles and Settings

SpliceDeck works the same way on every Stream Deck and on every computer it supports. A few features depend on the hardware you have or on what your operating system allows, and this section explains those differences. It also covers SpliceDeck's own settings, how SpliceDeck keeps your deck in step with Resolve without slowing Resolve down, and the languages it speaks.

Stream Deck Models

Every SpliceDeck key action works on every Stream Deck model with keys. Dial actions need a Stream Deck with dials. On Stream Deck +, each dial also has its own segment of the touch strip above it, which SpliceDeck uses to show live information such as timecode, a map of your markers or render progress.

MODEL	WHAT SPLICEDECK CAN USE
Stream Deck, MK.2, XL, Mini and Neo	All key actions. Each key shows live state from Resolve.
Stream Deck +	All key actions, plus all dial actions with their touch strips, and the bundled SpliceDeck profile. Tap or long-touch a strip segment for the gestures described in each action's chapter.
Stream Deck + XL	The same as Stream Deck +, with more keys and dials.
Stream Deck Studio	All key actions. Its dials can turn and press, but they have no touch strip, so strip information and tap gestures are not available.
Stream Deck Mobile	All key actions.
Stream Deck Pedal	Key actions can be assigned to pedals. The pedals have no display, so you won't see live state.

Some actions come in two versions, for example **Live Timecode**, **Color Version** and **Export Timeline**. You can place them on a key or on a dial, and each version is drawn for the space it has.

NOTE You can connect several Stream Decks at the same time. Each key and dial is independent, so you can, for example, keep your editing keys on a Stream Deck XL and your jog and marker dials on a Stream Deck + beside it.

The Bundled SpliceDeck Profile

On a Stream Deck +, SpliceDeck comes with a profile called **SpliceDeck**. The Stream Deck app offers to install it together with the plugin. It has eight pages, in Resolve's page order: Media, Cut, Edit, Fusion, Color, Fairlight, Deliver and Project, with the Page Dial on dial 2 of every page. **Using the SpliceDeck Profile** in **Understanding SpliceDeck** lists every key and dial.

The deck follows Resolve. When Resolve opens another page, whether from the Page Dial, the mouse or the keyboard, the Stream Deck + switches to the matching page of the SpliceDeck profile. SpliceDeck only ever switches to its own profile, never to one of yours, and only once Resolve has really changed page, so a dial you are still turning is never replaced.

- **You can change it.** Select any key or dial of the profile and swap its action or change its settings, as with any profile.
- **Other models.** Stream Deck models without dials do not get the bundled profile. Build your own pages as described next, and consider the **Context Key** in **Project, Pages and Layout**.

NOTE If the deck doesn't follow Resolve's pages, check that you have a Stream Deck + and that the SpliceDeck profile is installed. Help and Troubleshooting has the details.

Building Your Own Profiles and Pages

A Stream Deck **profile** is a complete layout for one device, and each profile can have several **pages**. Keeping SpliceDeck in its own profile means your other layouts stay exactly as they are. The bundled profile described on the previous page is a good starting point to copy from.

1. In the Stream Deck app, open the profile menu at the top of the window and choose **New Profile**. Give it a name, for example **Resolve**.
2. Drag SpliceDeck actions from the **SpliceDeck for DaVinci Resolve** category onto the keys and dials.
3. Click an action to change its settings in the area below the canvas. Settings are saved for that key only, so you can have two **Add Marker** keys with different colours side by side.
4. To add a page, click **+** next to the page indicator.
5. In the profile's settings, you can link it to DaVinci Resolve, so the Stream Deck app switches to it whenever Resolve is in front.

> **TIP** Keys on pages you are not looking at cost nothing, because SpliceDeck only draws the keys that are on screen. You can have as many pages as you like.

Using Multi-Actions

A Stream Deck multi-action runs several actions, one after the other, from a single key. SpliceDeck key actions can be part of a multi-action, with a few things to keep in mind.

- **Dial actions can't be added.** Playhead Jog, Marker Dial and the other dial actions are not available in multi-actions.
- **Each step is a single press.** Hold gestures, such as holding Add Marker to open Resolve's Markers panel, don't apply inside a multi-action.
- **Use fixed actions instead of toggles.** Set **On press** on Track On/Off to **Turn on** or **Turn off**, and on Track Lock to **Lock** or **Unlock**, so the multi-action always ends in the same state. **Press again to go back** on Switch Timeline is ignored inside a multi-action.
- **Give slow steps time.** Opening the Fusion or Color page on a large project can take a moment. Add a **Delay** step after it if a later step depends on it.

Platforms

SpliceDeck runs in the Elgato Stream Deck app on macOS and Windows, and in OpenDeck on Linux. Almost everything works through Resolve's scripting interface, which is the same on every platform. A few features need something the scripting interface doesn't offer: Turbo Jog, zooming the timeline with Shift and the Playhead Jog dial, the **Split** press of Split / Ripple Delete, and opening Resolve's Markers panel by holding Add Marker. For these, SpliceDeck uses Resolve's own menu or keyboard commands, which depends on what each operating system allows.

FEATURE	MACOS	WINDOWS	LINUX (OPENDECK)
All other actions	Yes	Yes	Yes
Turbo Jog	Yes. Needs the Accessibility permission. Works while Resolve is the frontmost app.	Yes. No permission needed. Works while Resolve is the foreground window.	Yes, in X11 sessions. Not available under Wayland.
Shift + turn to zoom	Yes, through Resolve's **View > Zoom** menu. Needs Accessibility.	Yes, through Resolve's default zoom shortcuts.	No
Split (press)	Yes, through Resolve's **Timeline > Split Clips** menu. Needs Accessibility.	Yes, through Resolve's default **Ctrl+** shortcut.	No
Ripple Delete (hold)	Yes	Yes	Yes
Markers panel (hold Add Marker)	Yes, through **Mark > Modify Marker**. Needs Accessibility.	No	No
Add Marker while Resolve plays	Yes. Needs Accessibility.	Yes	No
Project Settings key	Yes, through **File > Project Settings…**. Needs Accessibility.	Yes, through Resolve's default **Shift+9** shortcut.	No
Graphic touch strips	Yes	Yes	Plain text by default
Reconnect the moment Resolve starts	Yes	Yes	Within about 3 seconds

NOTE When Turbo Jog can't be used, the Playhead Jog dial still works and always lands on the right frame. It moves the playhead through the scripting interface instead, so Resolve's viewer updates about twice a second while you spin.

macOS

On macOS, Turbo Jog, Shift zoom, Split, the Markers panel, the Project Settings key and Add Marker during playback all need the **Accessibility** permission for the Elgato Stream Deck app. **Turning On Turbo Jog** in Getting Started shows how to switch it on. SpliceDeck's helper programs run inside the Stream Deck app, so you only need to allow the Stream Deck app itself, not Python or SpliceDeck.

For zoom, Split and the Markers panel, SpliceDeck presses the items in Resolve's menus for you rather than typing shortcuts, so it works with any keyboard layout and any custom shortcuts in Resolve. SpliceDeck finds the Split Clips and Modify Marker items by their English names, so these two need Resolve's user interface set to English.

TIP If **Elgato Stream Deck** is already switched on in **Accessibility** but Turbo Jog or Split still doesn't work, macOS may be holding on to an old permission. Select it in the list, click **-** to remove it, add it again with **+**, then quit and reopen the Stream Deck app.

Windows


Windows needs no permission. SpliceDeck sends Resolve's default shortcuts, and only while Resolve is the foreground window: **Ctrl+=** to zoom in, **Ctrl+-** to zoom out, **Shift+Z** to zoom to fit and **Ctrl+** to split. If you have changed these shortcuts in Resolve's keyboard customisation, or use a keyboard layout where these keys are in different places, zoom and Split may not work. The Markers panel can't be opened on Windows, so set **Hold the key** on Add Marker to **Delete the marker under the playhead** or **Nothing**.

Linux and OpenDeck


- **Touch strips.** OpenDeck's custom touch-strip layouts are not verified, so dials show a plain text strip by default. Live Timecode and Page Dial have a **Touch strip** setting to choose **Graphic** or **Text only**, and the Marker Dial can also draw its strip on the dial image.
- **Flatpak.** The Flatpak build of OpenDeck can hide your Python and `/opt/resolve` from plugins. If keys say **No Python** or **No API**, set the paths in SpliceDeck's settings, or use a non-Flatpak OpenDeck.
- **Turbo Jog** needs an X11 session. Under Wayland, jogging works through the scripting interface.
- **Turning a dial while pressed** may be reported as a normal turn by OpenDeck, so push-and-turn gestures can behave like plain turns.

Zooming the Timeline with Shift

On macOS and Windows, the Playhead Jog dial doubles as a timeline zoom control. Hold **Shift** on your computer keyboard and turn the dial: clockwise zooms in, anticlockwise zooms out. Push the dial while holding Shift to zoom the timeline to fit. While Shift is held, the dial's touch strip changes to show that it is zooming.

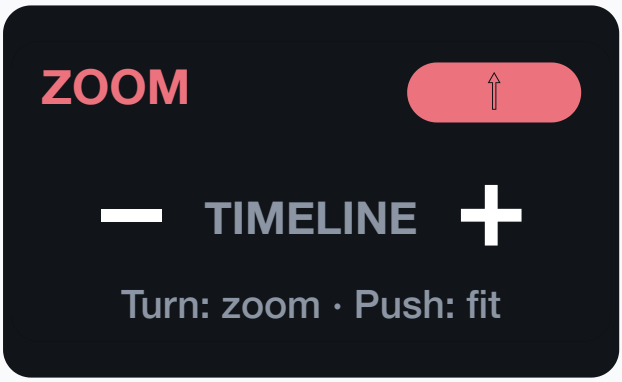

Shift held. The strip shows **ZOOM**. Turn to zoom the timeline, push to fit.

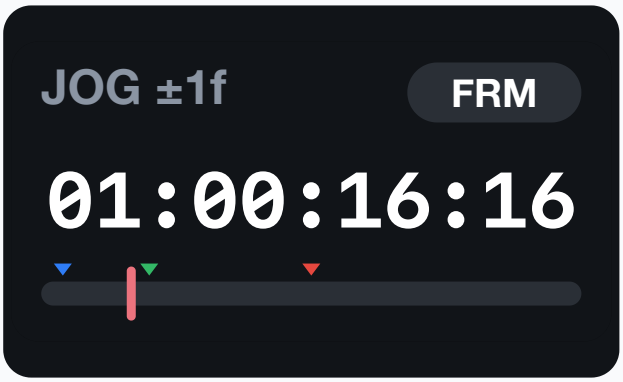

Shift released. The dial goes straight back to jogging.

To turn this off, select the Playhead Jog dial and clear **Shift + turn: zoom the timeline** in its settings. If the dial shows **Zoom: bring Resolve to the front**, click in Resolve's window and try again.

SpliceDeck Settings

Most settings belong to one key or dial. A few settings apply to SpliceDeck as a whole. You can reach them from any SpliceDeck action.

1. In the Stream Deck app, click any SpliceDeck key or dial.
2. Scroll to the bottom of its settings and expand **SpliceDeck settings**.
3. Change a setting. It takes effect straight away for every SpliceDeck action.

SETTING	WHAT IT DOES
Python interpreter	The full path to the Python SpliceDeck should use. Leave it empty to find Python automatically.
Default export folder	Where exports go when an action doesn't name its own folder. Empty means `~/Movies/SpliceDeck` on macOS, `%USERPROFILE%\Videos\SpliceDeck` on Windows and a **SpliceDeck** folder inside your Videos folder on Linux. Paths can start with `~`.
Resolve scripting API folder	The folder with Resolve's scripting modules, if Resolve is installed in an unusual place. Leave it empty to find it automatically.
fusionscript library	The path to Resolve's `fusionscript` library. Leave it empty to find it automatically.
Polling	**Responsive**, **Balanced** or **Battery saver**. See the next page.

The last line of the section shows the live connection, for example **connected - DaVinci Resolve Studio 20.2.3**. Changing one of the three path settings restarts SpliceDeck's connection to Resolve.

Languages

SpliceDeck is available in English, Deutsch, Español, Français and 日本語, including the text on keys and touch strips and the action settings. It uses the language of the Stream Deck app, and English for any other language. SpliceDeck picks up the language when it starts, so after changing the language of the Stream Deck app, quit and reopen the app. The **SpliceDeck settings** section is shown in English in every language.

Performance

Resolve doesn't tell other programs when something changes, so SpliceDeck asks. Many times a second it checks the page, the playhead, your markers, render progress and the other things your keys show, and it redraws only the keys whose information has changed. Each check takes a few milliseconds and doesn't slow Resolve down.

SpliceDeck checks more often while things are changing and less often when nothing is happening. The page you are on and the playhead are checked on a fast lane of their own, so a page you click with the mouse, or playback you start in Resolve, reaches the deck almost at once. The **Polling** setting sets how often SpliceDeck checks:

POLLING	WHILE CHANGING	IDLE	IDLE OVER A MINUTE	PAGE AND PLAYHEAD
Responsive	40 ms	300 ms	1 s	50 ms
Balanced	66 ms	500 ms	1.5 s	80 ms
Battery saver	100 ms	1 s	3 s	150 ms

Responsive is the default. Choose Battery saver on a laptop running on battery. Presses on the deck always light up straight away, whichever profile you choose. While a render is running, progress is checked at most four times a second, and when no SpliceDeck key is visible, SpliceDeck checks only every 2 seconds.

Why Turbo Jog Exists

Resolve's scripting interface accepts a new playhead position only about every 500 milliseconds. A jog wheel driven only through scripting would update Resolve's viewer twice a second, and every other key would wait behind it. Resolve's own frame-step commands have no such limit, so Turbo Jog sends those instead and checks the result through scripting once you stop turning. While you spin the dial, SpliceDeck also pauses its checks on Resolve, so Resolve can spend all its time drawing frames. The checks resume within half a second of the last turn.

The SpliceDeck Harness

The SpliceDeck harness is a Stream Deck that runs in your web browser. It starts the real SpliceDeck plugin exactly the way the Stream Deck app does, and draws every key, dial and touch strip live, at the resolution of the real hardware. You use it with the mouse.

The harness is a tool for building and testing SpliceDeck. You don't need it to use SpliceDeck with your Stream Deck. It is useful for trying out a layout, seeing what a key does without touching your project, or checking a change to SpliceDeck's source code.

By default the harness doesn't connect to your Resolve at all. It uses a **mock Resolve**: a simulated copy of Resolve with a project, a timeline, clips, markers and a render queue, which you can change from the harness itself. Nothing you do in mock mode can affect a real project.

What You Need

- The SpliceDeck source folder.
- Node.js 20 or later, with `npm`.
- Python 3.8 or later, as for the plugin. The mock Resolve runs in Python too.

Starting the Harness

1. Open a terminal in the SpliceDeck folder and install the dependencies with `npm install`. You only need to do this once.
2. Build the plugin with `npm run build`. The harness runs the built plugin, so build again after changing the source.
3. Start the harness with `npm run harness`. The terminal prints the address of the harness, normally `http://127.0.0.1:5199`.
4. Open that address in your browser. To stop the harness, press **Ctrl+C** in the terminal.

TIP Use the `127.0.0.1` address rather than `localhost`, which can point at a different program. If port 5199 is busy, the harness moves to the next free port and prints the new address. To choose a port yourself, run `node harness/server.mjs --port 5300`.

Finding Your Way Around

The harness window has four areas.

AREA	WHAT IT SHOWS
Top bar	Status chips for the harness, the plugin, its Python connection and the connection to Resolve. It also has the **Mock Resolve** and **Live Resolve** switch, a **Scenario** menu, a **Host** menu, a **hot reload** checkbox, **Host options** and **Restart plugin**.
Action list	On the left, every SpliceDeck action by group. **K** marks a key action and **D** a dial action. Type in **Filter** to find one.
Devices	In the middle, one or more Stream Decks with their pages, a multi-action area, and an inspector for the selected key with a live preview and the action's real settings.
Side panel	On the right, the tabs **Resolve**, **Snapshot**, **Events**, **Bridge**, **Plugin log**, **Latency** and **Global**.

Setting Up a Deck

1. Choose a device in the bar above the deck. The harness has Stream Deck +, MK.2, XL, Mini, Neo, + XL, Studio, Pedal and Mobile, and you can plug in several at once. Click ● or ○ next to a name to plug a device in or out.
2. Drag an action from the action list onto a key or dial.
3. Click a key to press it. To hold it, keep the mouse button down. For a dial, use ◀ and ▶ to turn it one step (hold Shift for ten) and **press** to push it. Click a strip segment to tap it.
4. To open an action's settings, click the grip ⠿ on its key, or right-click the key and choose **Inspect**. Drag the grip to move the key, or drop it on the action list to remove it.

Each device has page buttons above it, with **+ page** and **+ folder** to add more. On a Stream Deck +, you can also swipe across the touch strip to change page, as on the real hardware. Your layouts, pages and settings are kept when you restart the harness.

> **NOTE** The harness checks SpliceDeck the way the Stream Deck app would, and shows any problems it finds in the top bar and on the affected key or dial.

Working with the Mock Resolve

The **Resolve** tab in the side panel controls the mock Resolve. Its sections are **Mock application**, **Transport / playhead**, **Timeline markers**, **Clip under playhead**, **Tracks** and **Render queue**. Changes you make here act like an editor working in Resolve with the mouse: the keys pick them up on SpliceDeck's next check.

- **Resolve running** and **Scripting enabled** switch the mock off or refuse scripting, so you can see every offline state the keys show.
- **Studio** or **Free edition** changes the edition the mock reports.
- **Reset world** rebuilds the mock from the current scenario, and **clock +1s** moves its clock on, for example to advance a render.

The **Scenario** menu in the top bar chooses where the mock starts: **default**, **playing**, **rendering**, **not_running**, **scripting_disabled**, **free**, **no_project**, **no_timeline** or **empty_timeline**.

The other tabs show what is happening inside SpliceDeck. **Snapshot** is what SpliceDeck has read from Resolve. **Events**, **Bridge** and **Plugin log** list the messages between the harness, the plugin and Resolve. **Latency** measures the time from a press to the key's new image. **Global** shows SpliceDeck's settings and can simulate sleep and wake, or a Stream Deck app restart.

Testing with Your Real Resolve

The harness can also connect to the DaVinci Resolve Studio running on your computer, to check that keys show your real project correctly. In live mode, SpliceDeck may only read from Resolve: anything that would change the project is blocked, and keys that would change something are marked **!**.

1. Start the harness with `node harness/server.mjs --allow-live`. Without this option, live mode can't be switched on.
2. Click **Live Resolve** in the top bar and type **LIVE** to confirm.
3. Click **Mock Resolve** to go back. The harness always starts in mock mode.


IMPORTANT Even with the read-only protection, don't press keys marked **!** in live mode. Use the mock Resolve for anything that changes a project.

Help and Troubleshooting


When something stops SpliceDeck working, the keys say so in plain words instead of failing silently. This section explains every message the keys can show and how to fix it. Most problems take one setting to put right.

What the Keys Are Telling You


When SpliceDeck can't reach Resolve, or Resolve has nothing for an action to work on, each key shows a short status word instead of its normal image. The Resolve Status key shows a longer explanation.

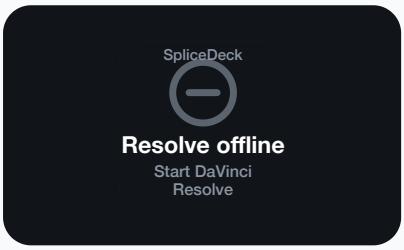

Resolve Status explains the problem.

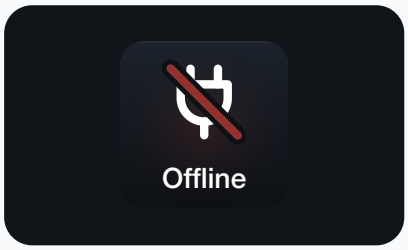

Other keys show a short word.

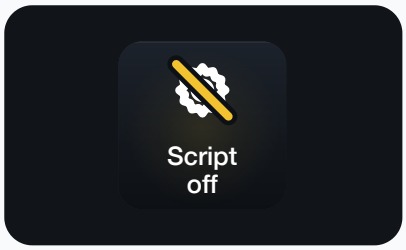

Script off: scripting is refused.

KEY SHOWS	RESOLVE STATUS SHOWS	WHAT IT MEANS AND WHAT TO DO
Connecting	Starting	SpliceDeck is starting up.
Offline	Resolve offline, Start DaVinci Resolve	Resolve isn't running, or a Resolve dialog is open. SpliceDeck reconnects by itself.
Script off	Can't connect, 1 Resolve Studio, 2 Scripting: Local	Use Resolve Studio, with external scripting set to Local.
No API	Resolve not found, Set paths in settings	Resolve's scripting files weren't found. See **Resolve Not Found**.
No Python	No Python, Install Python 3.8+	No usable Python was found. See **No Python**.
Reconnecting	Reconnecting, Bridge restarting	SpliceDeck's connection is restarting by itself.
No project	No project	Open a project in Resolve.
No timeline	No timeline	Open a timeline in the project.

Short Messages After a Press

If Resolve can't do what a key asks, the key flashes a short message for about a second and the Stream Deck app shows a small warning sign on the key.

MESSAGE	WHAT IT MEANS
No clip here	There is no clip under the playhead on the track the action uses.
Wrong page	The action doesn't work on the current Resolve page. Playhead and marker actions need the Cut, Edit, Color, Fairlight or Deliver page.
Check settings	A setting of the key is missing or not valid, such as a file not chosen yet.
Resolve refused	Resolve received the request but didn't carry it out, for example on a locked track.
Not found	The thing the key is looking for doesn't exist, such as a next marker after the last one.
Busy	Resolve is rendering, and the action can't run during a render.
Resolve was busy	Resolve didn't answer in time, often because a dialog was open. The request was dropped rather than run late. Press again.
Timed out	Resolve took too long to answer.
Track locked	Resolve won't change a locked track. Unlock it first.
Live marker: Resolve in front	Add Marker needs Resolve in front while Resolve plays. Click in Resolve and press again.
Settings: allow Accessibility	The Project Settings key needs the macOS Accessibility permission for the Stream Deck app.
Not available	This part of SpliceDeck failed to load. Restart the Stream Deck app and check the log file.

Connection Problems

Keys Go Offline While a Resolve Dialog Is Open

While a dialog is open in Resolve, for example Preferences, a save prompt or the render settings, Resolve pauses all scripting. SpliceDeck's keys show **Offline** or stop updating until you close the dialog, and then recover by themselves. A press made while the dialog was open is dropped with **Resolve was busy** rather than carried out later.

Script Off or Can't Connect

Resolve is running but refuses SpliceDeck's connection. There are two possible reasons, and Resolve doesn't say which one it is.

1. Check that you have **DaVinci Resolve Studio**. Open **DaVinci Resolve > About DaVinci Resolve**. The free edition of Resolve doesn't allow external scripting, so SpliceDeck can't work with it.
2. Check that **External scripting using** is set to **Local** in **Preferences > System > General**, as described in Getting Started.
3. Quit and reopen Resolve after changing the setting.

No Python

SpliceDeck's connection to Resolve needs 64-bit Python 3.8 or later. The Stream Deck app starts plugins with a very short list of places to look for programs, so a Python that works in your terminal may still be missed.

1. Install Python 3 as described in **Checking Python** in Getting Started.
2. If the keys still say **No Python**, find the full path to your Python. In a terminal, type `which python3` on macOS or Linux, or `py -3 -c "import sys; print(sys.executable)"` on Windows.
3. Click any SpliceDeck key in the Stream Deck app, expand **SpliceDeck settings** and paste the path into **Python interpreter**.

Resolve Not Found

The keys show **No API** when SpliceDeck can't find Resolve's scripting files. It looks in the places Resolve installs them on each system, including `/opt/resolve` and `/home/resolve` on Linux. If Resolve is installed somewhere else, enter the folder that contains Resolve's scripting modules in **Resolve scripting API folder**, and the path to `fusionscript` in **fusionscript library**. Hold the Resolve Status key to see which paths SpliceDeck tried.

Reconnecting

SpliceDeck reconnects on its own when Resolve starts, restarts or quits, and when your computer wakes from sleep. It tries again quickly at first and then every 3 seconds. On macOS and Windows, it reconnects the moment Resolve starts. To reconnect straight away at any time, press the Resolve Status key or any key that shows a status word.

Turbo Jog, Zoom and Split

Jogging Updates Only Twice a Second

When Turbo Jog isn't available, the Playhead Jog dial moves the playhead through the scripting interface, which Resolve limits to about two updates a second. The playhead still lands on the right frame. Check the following:

- **Accessibility on macOS. Elgato Stream Deck** must be switched on in **System Settings > Privacy & Security > Accessibility**. See **Turning On Turbo Jog** in Getting Started.
- **Resolve in front.** Turbo Jog only works while Resolve is the frontmost app. Click in Resolve's window once.
- **The page.** Turbo Jog works on the Cut, Edit, Color and Fairlight pages, and in Jog mode. In Scroll mode, and on other pages, the dial uses scripting.
- **Frame-step shortcuts.** Turbo Jog uses the Left and Right Arrow keys, Resolve's Previous Frame and Next Frame commands. If you have assigned these commands to other keys in Resolve, Turbo Jog can't be used.
- **Linux.** Turbo Jog needs an X11 session. It isn't available under Wayland.

Turbo Jog checks every move. If Resolve doesn't follow the frame steps three times in a row, the dial stops using Turbo Jog to keep the playhead accurate. Switch to another Stream Deck page and back to try again.

Shift and Turn Does Nothing

Timeline zoom with Shift works on macOS and Windows, not on Linux. Check that **Shift + turn: zoom the timeline** is selected in the Playhead Jog settings. If the dial shows **Zoom: bring Resolve to the front**, click in Resolve's window first. On macOS, zoom needs the Accessibility permission. On Windows, it uses Resolve's default zoom shortcuts, so it won't work if you have changed them.

Split and Markers Panel Messages

- **Edit or Cut page.** Split only works on the Edit and Cut pages.
- **Split: allow Accessibility.** SpliceDeck couldn't run Resolve's **Split Clips** command. On macOS, switch on the Accessibility permission and make sure Resolve's interface language is English. On Windows, click in Resolve's window so it is in front.
- **Split unavailable.** SpliceDeck's helper for Split isn't running, usually because no Python was found.
- **Marker panel: macOS + Accessibility.** Opening Resolve's Markers panel by holding Add Marker only works on macOS with Accessibility switched on and Resolve in English. On other systems, set **Hold the key** to another option.

Markers and Ripple Delete

A Marker Isn't Added

- **Marker exists.** Resolve allows only one marker on each frame. Move the playhead, or delete the existing marker first.
- **Outside timeline.** The playhead is beyond the start or end of the timeline, or of the clip when the key adds markers to clips.
- **Wrong page.** Markers can't be placed on the Media or Fusion page, because Resolve doesn't report the playhead there. Switch to the Cut, Edit, Color, Fairlight or Deliver page.
- **No marker while Resolve plays.** Resolve must be in front, its Add Marker shortcut must be **M** and the keyboard QWERTY (not AZERTY, for example). Otherwise stop playback first.

Ripple Delete Is Refused

Holding Split / Ripple Delete deletes the clip under the playhead together with its linked audio and closes the gap. If the key shows **Resolve refused**, the most likely reason is that the clip, or its linked audio, is on a locked track. Unlock the track in Resolve's timeline header, or with a Track Lock key, and try again. If the key shows **No clip here**, there is no clip under the playhead.

Finding the Log Files

SpliceDeck writes a log file that explains what it is doing, for example which Python it is using and why Turbo Jog isn't available. If you contact the developer about a problem, include the newest log file.

SYSTEM	LOG FOLDER
macOS	`~/Library/Application Support/com.elgato.StreamDeck/Plugins/com.jauge.splicedeck.sdPlugin/logs`
Windows	`%APPDATA%\Elgato\StreamDeck\Plugins\com.jauge.splicedeck.sdPlugin\logs`
Linux	The `logs` folder inside `com.jauge.splicedeck.sdPlugin` in OpenDeck's plugins folder.

The newest file is `com.jauge.splicedeck.0.log`. Older files have higher numbers.

> **TIP** On macOS, the **Library** folder is hidden. In the Finder, choose **Go > Go to Folder** and paste the path. On Windows, paste the path into the address bar of File Explorer.

Resolve Status Diagnostics

Hold the Resolve Status key for a moment to see diagnostics. When SpliceDeck is connected, the key shows how long one round trip to Resolve takes, how long SpliceDeck's last check took and how often it is checking. When it isn't connected, the key shows the exact reason, including the path that SpliceDeck tried.

Press the key to see the edition and version of Resolve. A press never drops a healthy connection. A small dot in the corner of the key shows the edition. It is green for Resolve Studio. If it is amber and the key says **Not Studio**, SpliceDeck is connected to an edition of Resolve other than Studio, and some features may not work.

Troubleshooting Checklist

PROBLEM	TRY THIS
Every key says Offline	Start Resolve, or close any open Resolve dialog. Press Resolve Status to reconnect now.
Every key says Script off	Use Resolve Studio. Set **External scripting using** to **Local** and restart Resolve.
Every key says No Python	Install 64-bit Python 3.8 or later, or enter its path in **Python interpreter**.
Every key says No API	Enter Resolve's scripting paths in **SpliceDeck settings**. On Linux with Flatpak OpenDeck, try a non-Flatpak OpenDeck.
Keys say No project or No timeline	Open a project, then a timeline, in Resolve.
Keys stop updating for a while	Close the open Resolve dialog. The keys recover by themselves.
Jog is slow to update the viewer	Switch on Accessibility for the Stream Deck app on macOS, click in Resolve so it is in front, and use the Cut, Edit, Color or Fairlight page.
Shift and turn doesn't zoom	Check the Playhead Jog setting, bring Resolve to the front, and on macOS switch on Accessibility. Not available on Linux.
Split doesn't split	Use the Edit or Cut page. On macOS switch on Accessibility and use Resolve in English. Not available on Linux.
Hold Add Marker shows an alert	The Markers panel needs macOS and Accessibility. Elsewhere, change **Hold the key**.
The deck doesn't follow Resolve's pages	Page follow needs a Stream Deck + with the bundled **SpliceDeck** profile installed. Other models don't get it. Reinstall the plugin to be offered the profile again.
Ripple delete shows Resolve refused	Unlock the clip's video and audio tracks.
A press shows Resolve was busy	Close the open Resolve dialog or wait for Resolve to finish, then press again.
The wrong language	Change the Stream Deck app's language, then quit and reopen it.
Nothing else helps	Quit and reopen the Stream Deck app, then Resolve. If the problem stays, contact the developer with the newest log file.

Support and Legal

Getting Help

The quickest way to solve most problems is **Help and Troubleshooting** in this manual. The Resolve Status key is also a good first stop: it tells you in plain words what is wrong, and holding it shows the exact reason.

If you still need help, or you would like to suggest a feature or report a bug, please email Recourse Software Inc., the maker of SpliceDeck, at **support@recoursellm.com**. To help us find the problem quickly, include:

- the SpliceDeck version, shown in the Stream Deck app's plugin list;
- your operating system and its version, and whether you use the Stream Deck app or OpenDeck;
- your Resolve Studio version, shown when you press the Resolve Status key;
- your Stream Deck model;
- what you did, what you expected and what happened instead;
- the newest log file, as described in **Finding the Log Files**.

> **NOTE** Log files can contain the names of your projects, timelines and folders. Look through a log file before you send it if those names are confidential.

Your Data

SpliceDeck runs entirely on your computer. It talks to DaVinci Resolve through Resolve's local scripting interface and doesn't connect to the internet. Your key settings and SpliceDeck's settings are stored by the Stream Deck app. SpliceDeck keeps a small amount of its own data, such as the track states that Track Solo restores, in `~/Library/Application Support/SpliceDeck` on macOS, `%APPDATA%\SpliceDeck` on Windows and `~/.local/state/splicedeck` on Linux.

Trademarks

DaVinci Resolve and DaVinci Resolve Studio are trademarks of Blackmagic Design Pty. Ltd. Stream Deck and Elgato are trademarks of Corsair Memory, Inc. macOS is a trademark of Apple Inc. Windows is a trademark of Microsoft Corporation. Linux is a registered trademark of Linus Torvalds. All other trademarks are the property of their respective owners.

SpliceDeck is made by Recourse Software Inc. and is an independent product. It is not affiliated with, endorsed by or sponsored by Blackmagic Design, Corsair or Elgato. All SpliceDeck artwork is original. SpliceDeck, its artwork and this manual are copyright © 2026 Recourse Software Inc. All rights reserved.

Warranty and Disclaimer

SpliceDeck is provided "as is", without warranty of any kind, express or implied, including the implied warranties of merchantability, fitness for a particular purpose and non-infringement. To the fullest extent permitted by law, Recourse Software Inc. is not liable for any claim, damages or other liability arising from the use of SpliceDeck, including loss of data, lost work or interrupted projects.

SpliceDeck makes real changes to your Resolve projects. Keys such as Ripple Delete, Delete Marker, Duplicate Timeline and Render Preset do exactly what they say. Save your project and keep backups as you normally would. The **Export Project Backup** action can make a `.drp` copy of your project at the press of a key.

IMPORTANT Nothing in this disclaimer limits any rights you have under the consumer laws of your country that cannot be excluded.

Third-Party Software

SpliceDeck includes the following open source software, each used under the MIT License:

COMPONENT	LICENCE
Elgato Stream Deck SDK (`@elgato/streamdeck`)	MIT License, Copyright (c) Corsair Memory Inc.
`@elgato/utils`	MIT License, Copyright (c) Corsair Memory Inc.
`ws` **WebSocket library**	MIT License, Copyright (c) 2011 Einar Otto Stangvik, Copyright (c) 2013 Arnout Kazemier and contributors, Copyright (c) 2016 Luigi Pinca and contributors

The text of the MIT License, which applies to each of these components together with its copyright notice above, is:

> Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:
>
> The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.
>
> THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

SpliceDeck also uses software that it doesn't include. Python is installed separately and is distributed by the Python Software Foundation under its own licence. Resolve's scripting modules belong to Blackmagic Design and are installed with DaVinci Resolve Studio.

About This Manual

This manual describes SpliceDeck plugin version 0.2, tested with DaVinci Resolve Studio 20.2.3. Features and the appearance of keys may change in later versions. If something on your deck looks different from this manual, check that you have the latest version of SpliceDeck.

SpliceDeck Installation and Operation Manual. Copyright © 2026 Recourse Software Inc. All rights reserved.